CIVIL PLAN SET

Test run: 2//DP227508

LOT 2//DP227508 | GUNNEDAH | ZONE R2 | 956 m2
New Dwelling
PRELIMINARY ISSUE: NOT FOR CONSTRUCTION

DRAWING INDEX

No.	TITLE	DATA STATUS
C100	Existing site conditions plan	DATA NOT AVAILABLE: existing services: DBYD / council records;...
C101	Proposed site plan	complete for supplied data
C200	Earthworks plan	complete for supplied data
C300	Stormwater drainage plan	DATA NOT AVAILABLE: existing stormwater assets: council records...
C310	Water and sewer services plan	DATA NOT AVAILABLE: existing water / sewer assets: DBYD /...
C400	Driveway and crossover plan	complete for supplied data
C410	Driveway longitudinal section	complete for supplied data
C420	Crossover details	complete for supplied data
C500	Erosion and sediment control plan	complete for supplied data
C600	Typical sections and details	complete for supplied data
C700	General notes and specification notes	complete for supplied data

ABBREVIATIONS AND NOTES

AHD Australian Height Datum | DBYD Dial Before You Dig | DEM digital elevation model | DP deposited plan | ESCP erosion and sediment control plan | FFL finished floor level


GDA2020 Geocentric Datum of Australia 2020 | MGA Map Grid of Australia | RL reduced level | RWT rainwater tank | TBC to be confirmed | NTS not to scale

Symbols and line types are listed in the legend on each sheet.

Indicative only. Not a survey. Verify BYDA plans and physically locate services before excavation. Verify setbacks with council. All items marked TO BE CONFIRMED require designer / council confirmation.

Text: Liberation Sans Narrow (metric-compatible substitute for the proprietary Arial Narrow; DXF text style 'ARIAL NARROW' -> arialn.ttf)

LOCALITY PLAN

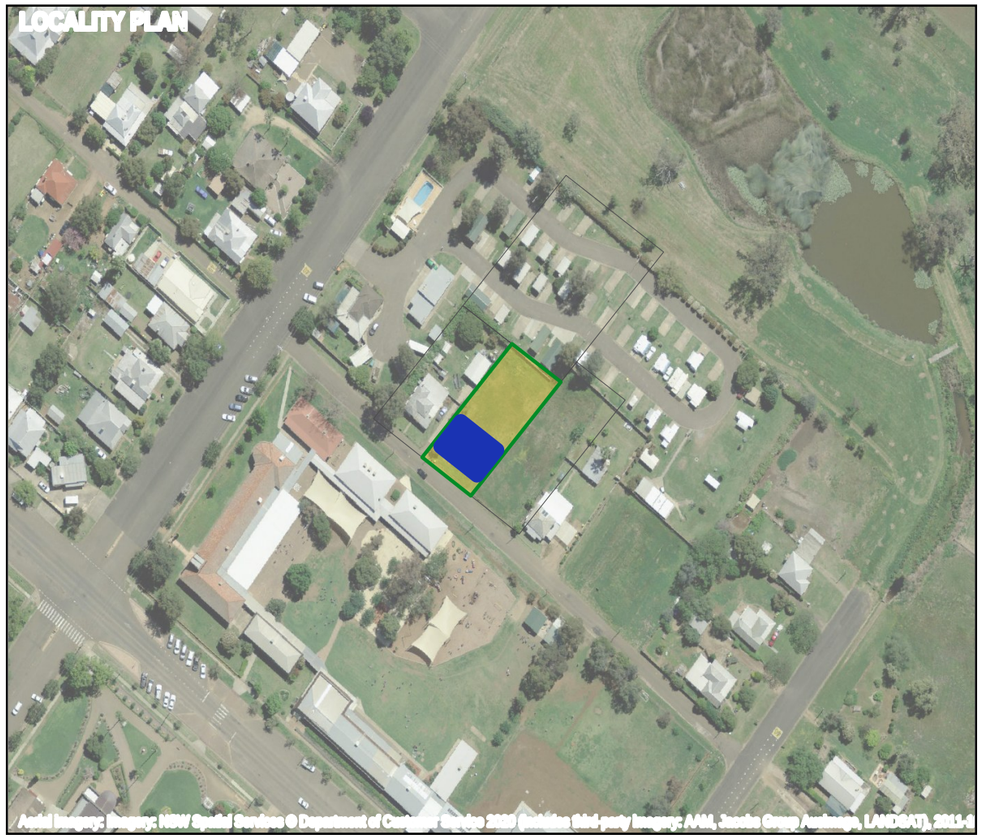

GENERAL NOTES

1. This plan set is PRELIMINARY and indicative; not for construction.
2. Boundaries from the NSW cadastre (not a survey). Adjoining lot labels from the cadastre lot layer.
3. Levels / contours are derived from the NSW 5 m DEM and are INDICATIVE; detail survey required before design.
4. Proposed structure footprint and FFL are ILLUSTRATIVE unless stated as from an architect plan.
5. Services shown are schematic; existing services to be confirmed from council records / DBYD.
6. Cited requirements show their source document and page; items without a citation are assumptions marked TO BE CONFIRMED.
7. Aerial imagery: NSW Spatial Services; verify terms before commercial use.
8. Sheets with missing inputs show a DATA NOT AVAILABLE panel; nothing is invented.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

N

GRID NORTH
(MGA2020)
SCALE AS SHOWN

LEGEND

- LOT BOUNDARY
- ADJOINING LOT BOUNDARY
- PROPOSED STRUCTURE
- BUILDING ENVELOPE
- EXISTING CONTOUR (INDICATIVE)
- PROPOSED CONTOUR

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508


LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling


SHEET TITLE
COVER SHEET, DRAWING INDEX AND LOCALITY PLAN

SCALE (A3) AS SHOWN	DATE 2026-10-12
DRAWN JCE	CHECKED
SHEET SIZE A3 LANDSCAPE	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C000	1 of 11	A

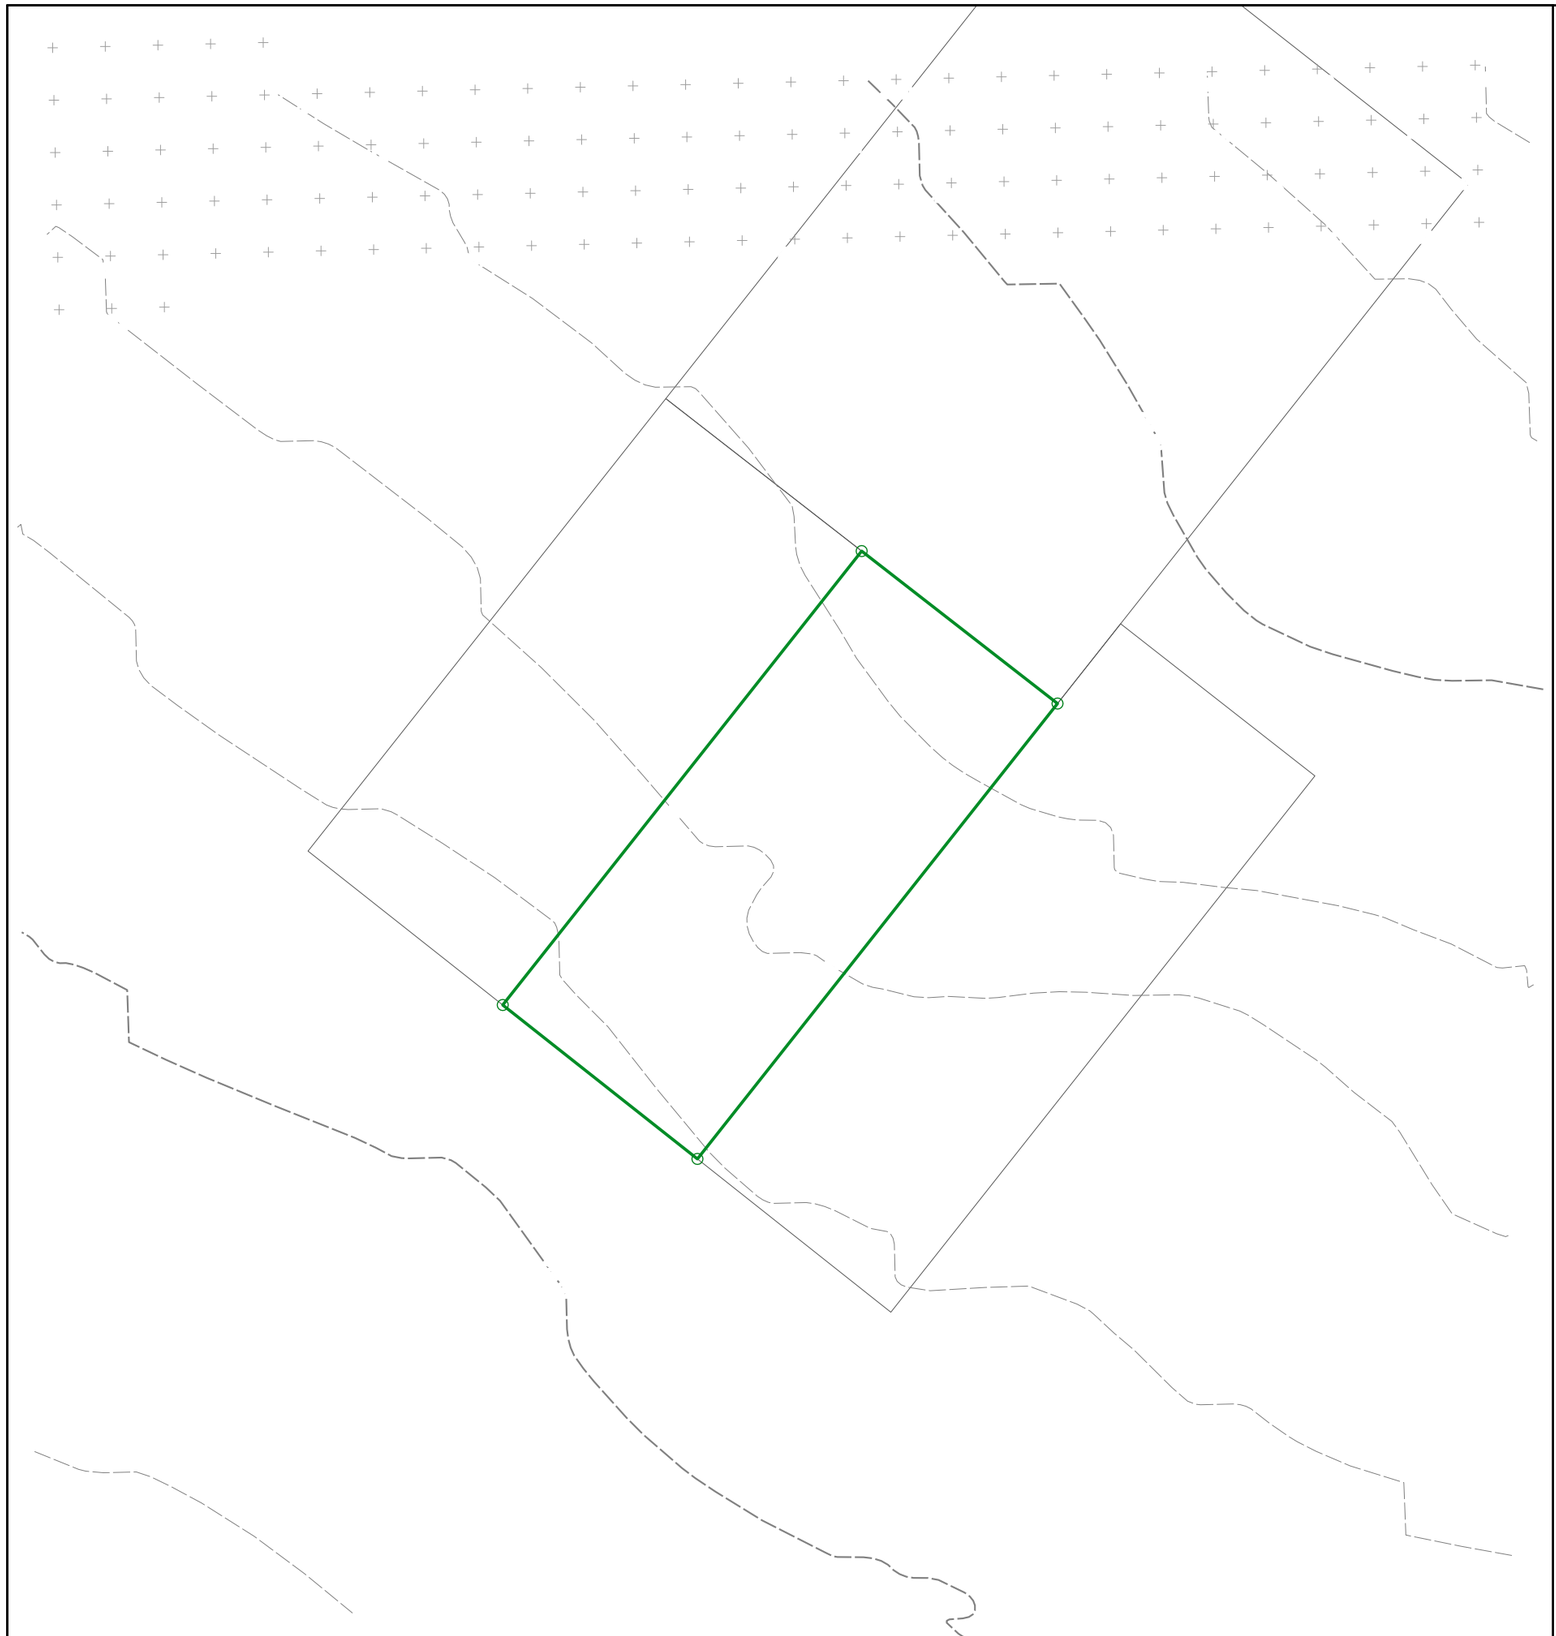



NOTES

WHOLE LOT shown at 1:500.

EXISTING CONTOURS at 0.5 m interval (index every 1), generated by marching triangles from the 5 m DEM sampled over the plan window.

EXISTING CONTOURS: INDICATIVE, DERIVED FROM 5 m DEM; DETAIL SURVEY REQUIRED. Contours are smoothed for plotting only. Vertical accuracy is NOT STATED by the data service (placeholder 5 m used in quantities).

Contours extend only as far as the supplied levels cover.

BOUNDARY: bearings and distances from the NSW cadastre (Spatial Services). Verify against the registered plan / survey.

ADJOINING LOTS labelled LOT / DP from the cadastre lot layer.

ROAD NAMES from the NSW roads layer; kerb, pavement and verge levels not surveyed.

EASEMENTS: none identified in the supplied data. A title search / s88B instrument is required.

EXISTING SERVICES: EXISTING SERVICE LOCATION TO BE CONFIRMED FROM COUNCIL RECORDS / DBYD. None drawn (not invented).

TREES / VEGETATION: none supplied; see aerial for indicative canopy only.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

N

GRID NORTH
(MGA2020)
SCALE 1:500

LEGEND

- LOT BOUNDARY (CADASTRE; NOT A SURVEY)
- ADJOINING LOT BOUNDARY
- EXISTING CONTOUR (INDICATIVE) MINOR
- EXISTING CONTOUR MAJOR (INDEX, RL LABELLED)
- DEM SPOT LEVEL (RL m AHD, 5 m posts)
- BOUNDARY CORNER (UNMARKED/UNVERIFIED)

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508


LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling


SHEET TITLE
EXISTING SITE CONDITIONS PLAN
2//DP227508 | 1:500 @ A3

SCALE (A3) **1:500**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C100	**2 of 12**	**A**

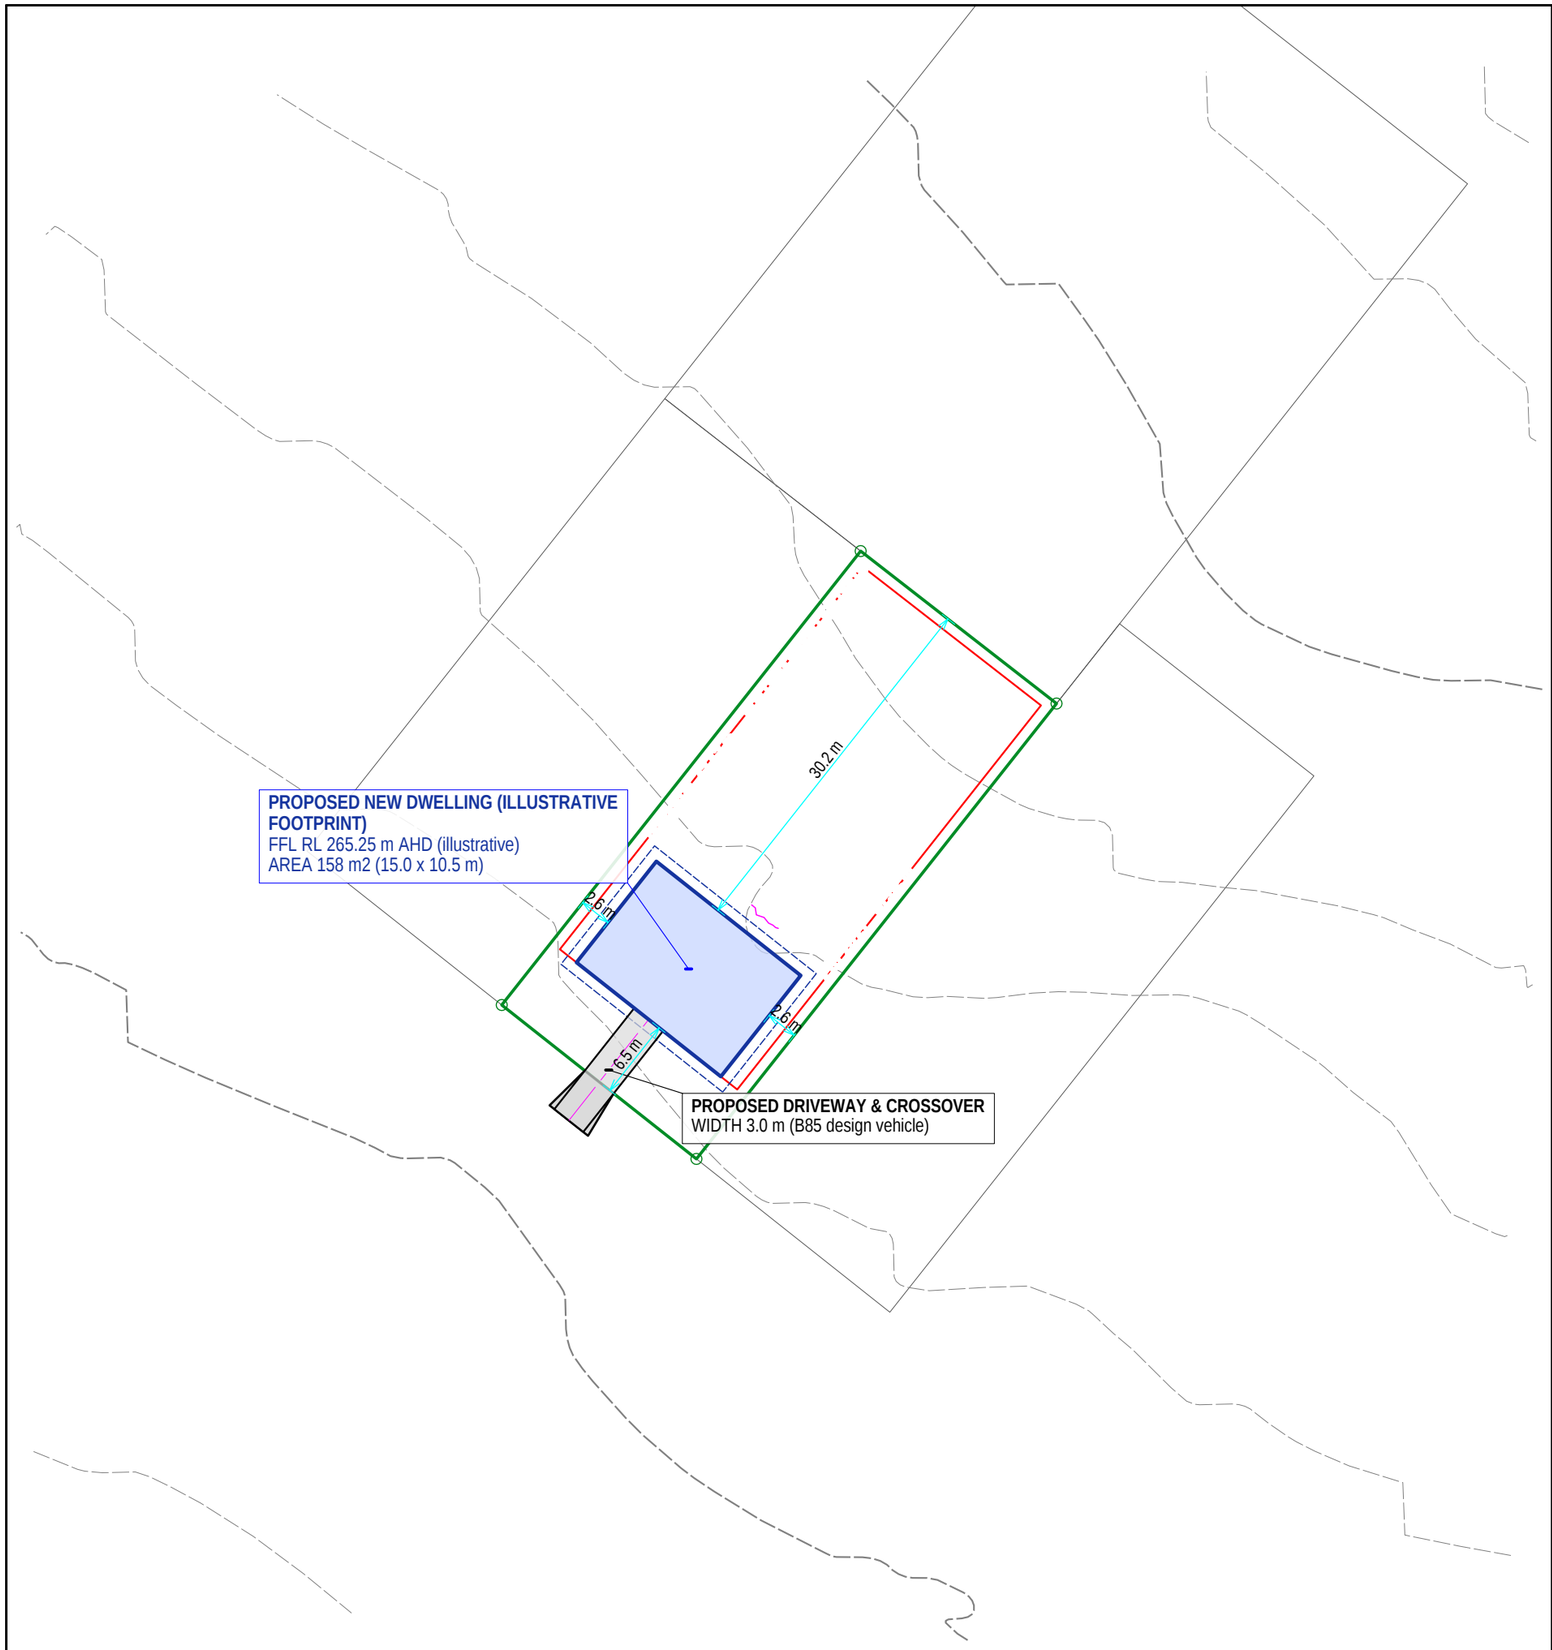



NOTES

WHOLE LOT shown at 1:500.

STRUCTURE: PROPOSED NEW DWELLING (ILLUSTRATIVE FOOTPRINT). Source: SA6 PRESET. Preset dimensions are editable drawing defaults, NOT compliance limits; position is illustrative (near the crossover, inside the envelope).

FFL: ILLUSTRATIVE FFL = mean existing ground under footprint; design FFL (flood / drainage / architect) TO BE CONFIRMED (RL 265.25)

ENVELOPE: setbacks as entered/cited in the council DCP; unresolved items: site_cover_max, height_max. Verify with council.

DRIVEWAY: see C400/C410/C420.

PROPOSED CONTOURS at 0.5 m: pad level + batters (cut 1V:2H, fill 1V:3H assumed) over the 5 m DEM sampled over the plan window; drawn only where the surface changes. EXISTING CONTOURS: INDICATIVE, DERIVED FROM 5 m DEM; DETAIL SURVEY REQUIRED.

SERVICES: see C300 (stormwater) and C310 (water / sewer).

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

N

GRID NORTH
(MGA2020)
SCALE 1:500

LEGEND

- LOT BOUNDARY (CADASTRE; NOT A SURVEY)
- ADJOINING LOT BOUNDARY
- BUILDING ENVELOPE (SETBACK LINE)
- PROPOSED STRUCTURE (SEE LABEL)
- DRIVEWAY / CROSSOVER
- PAD / BATTER LIMIT (INDICATIVE)
- PROPOSED CONTOUR (PAD + BATTERS)
- EXISTING CONTOUR (INDICATIVE)

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508
LOT / PLAN 2 DP227508
COUNCIL GUNNEDAH
ZONE / AREA R2 956 m2
DEVELOPMENT New Dwelling


SHEET TITLE
PROPOSED SITE PLAN


NEW DWELLING | 1:500 @ A3

SCALE (A3)	DATE
1:500	**2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C101	**3 of 11**	**A**

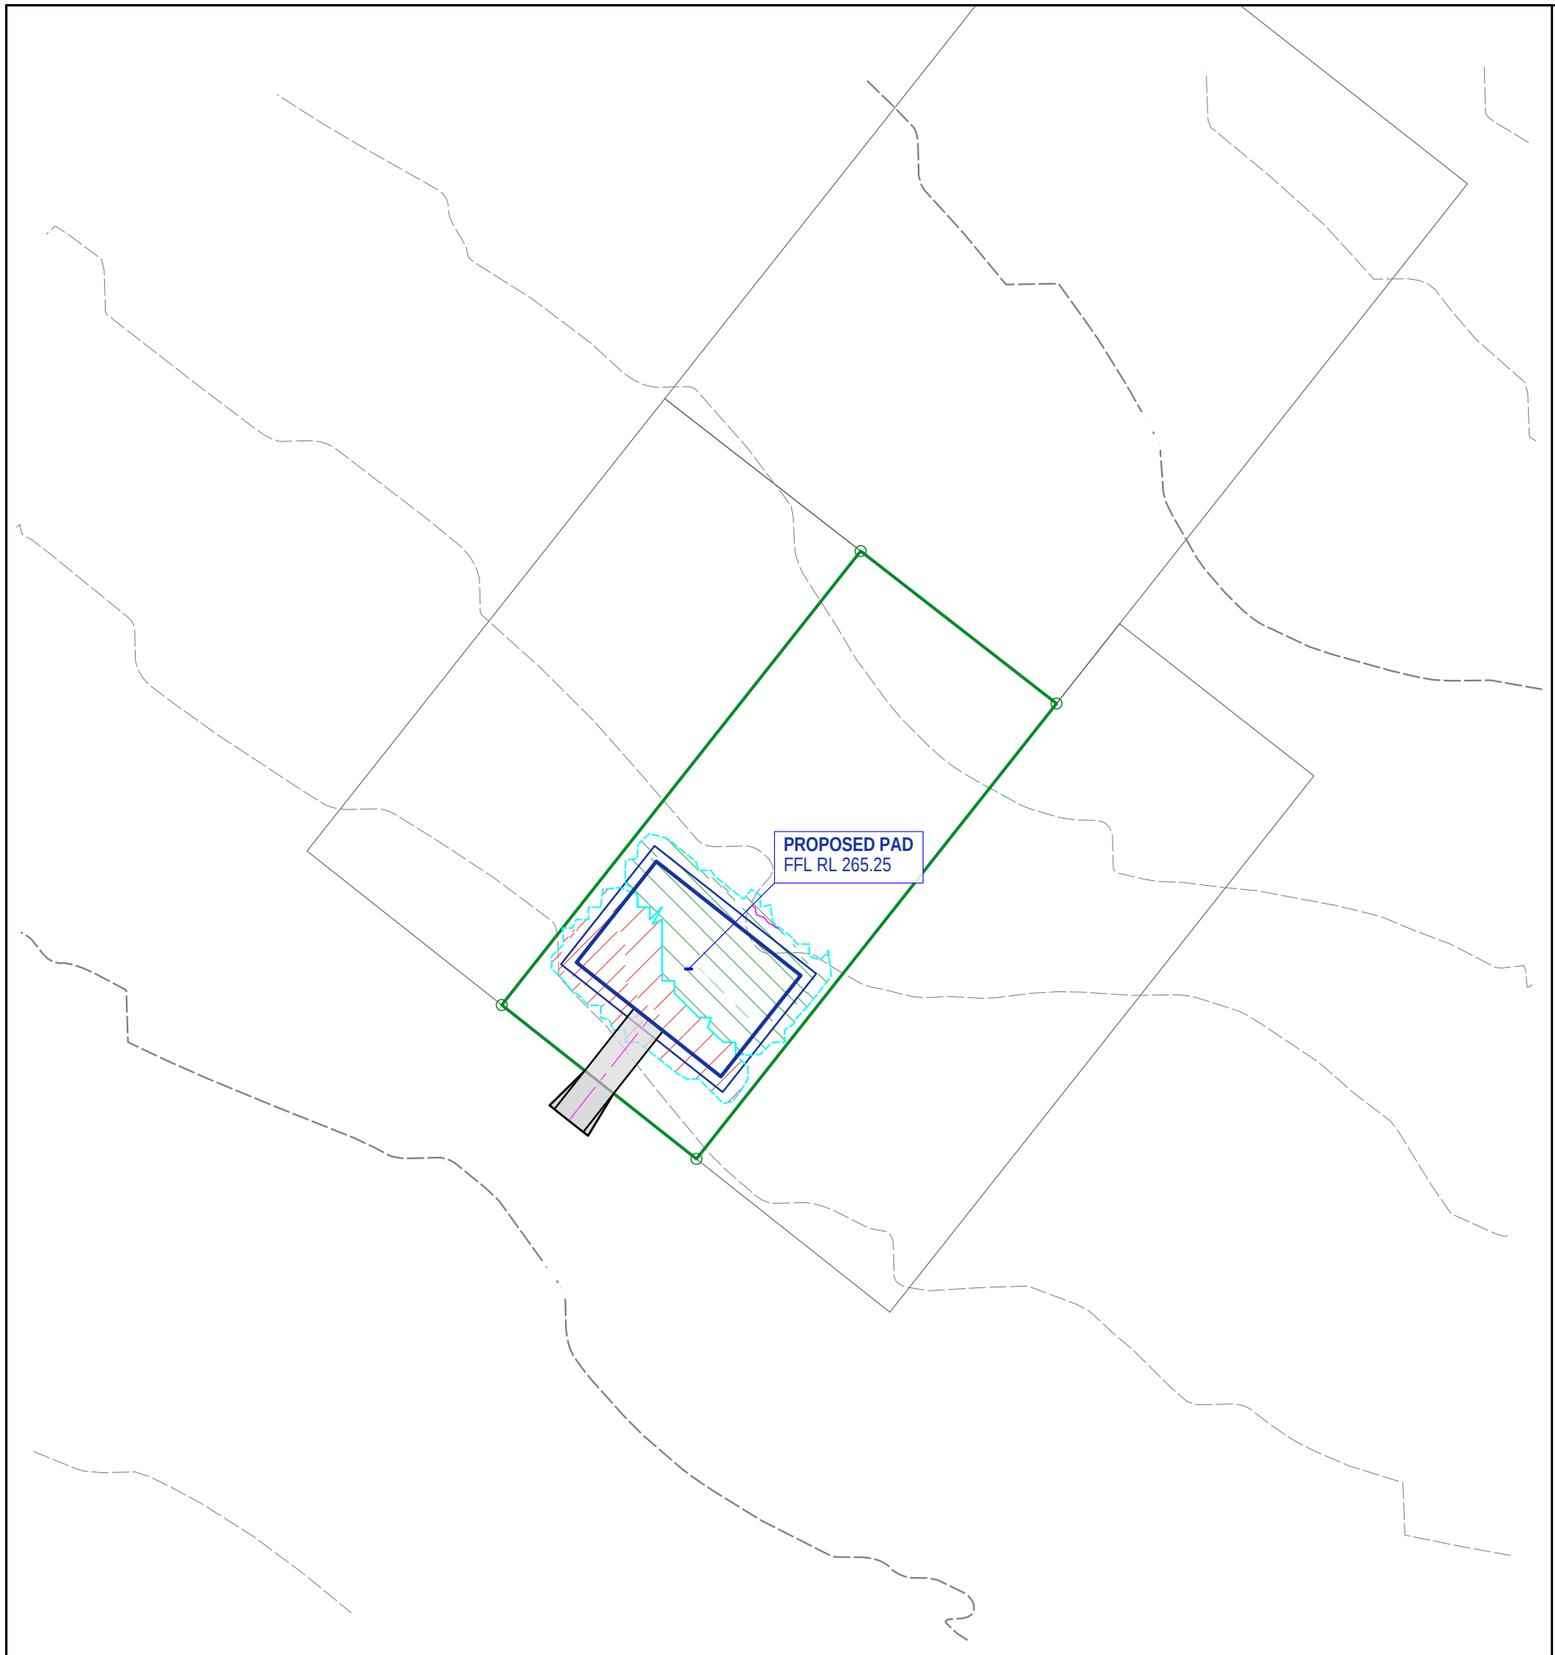



EARTHWORKS VOLUMES (INDICATIVE)

Pad level (FFL)	**RL 265.25 m**
Cut (bank)	**8.9 m3 over 115 m2**
Fill (compacted)	**16.1 m3 over 153 m2**
Net (cut - fill)	**-7.2 m3 (import)**
Topsoil strip	**40.3 m3 (269 m2 x 0.15 m)**
Cut (loose, x1.25)	**11.1 m3**
Fill (bank equiv.)	**17.9 m3 (shrinkage 0.90)**
Volume uncertainty	**+/- 1,344 m3 (5377 %)**

NOTES

Batters: cut 1V:2H, fill 1V:3H and 0.9 m pad apron are ASSUMED design parameters (geotechnical advice required).

Depth bands (hatch spacing): <0.1, 0.1-0.5, 0.5-1.0, 1.0-2.0, >2.0 m.

Volumes by prismoidal method on the 5 m DEM-derived TIN. INDICATIVE, DERIVED FROM 5 m DEM; DETAIL SURVEY REQUIRED. Vertical accuracy not stated by the service; quantities are NOT suitable for pricing or earthworks certification.

No retaining wall required at the assumed pad level and thresholds (screening, not design).

vertical accuracy 5.0 m is coarse for earthworks

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

N

GRID NORTH
(MGA2020)
SCALE 1:500

LEGEND

- LOT BOUNDARY
- CUT (hatch spacing = depth band)
- FILL (hatch spacing = depth band)
- TOP OF CUT / TOE OF FILL (BATTER LIMIT)
- EXISTING CONTOUR (INDICATIVE)
- PROPOSED CONTOUR
- RETAINING WALL (SCREENING)
- PAD (BUILDING + 0.9 m APRON)

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508
LOT / PLAN 2 DP227508
COUNCIL GUNNEDAH
ZONE / AREA R2 956 m2
DEVELOPMENT New Dwelling


SHEET TITLE
EARTHWORKS PLAN


Cut / fill, batters and volumes | 1:500 @ A3

SCALE (A3) **1:500**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C200	**4 of 12**	**A**

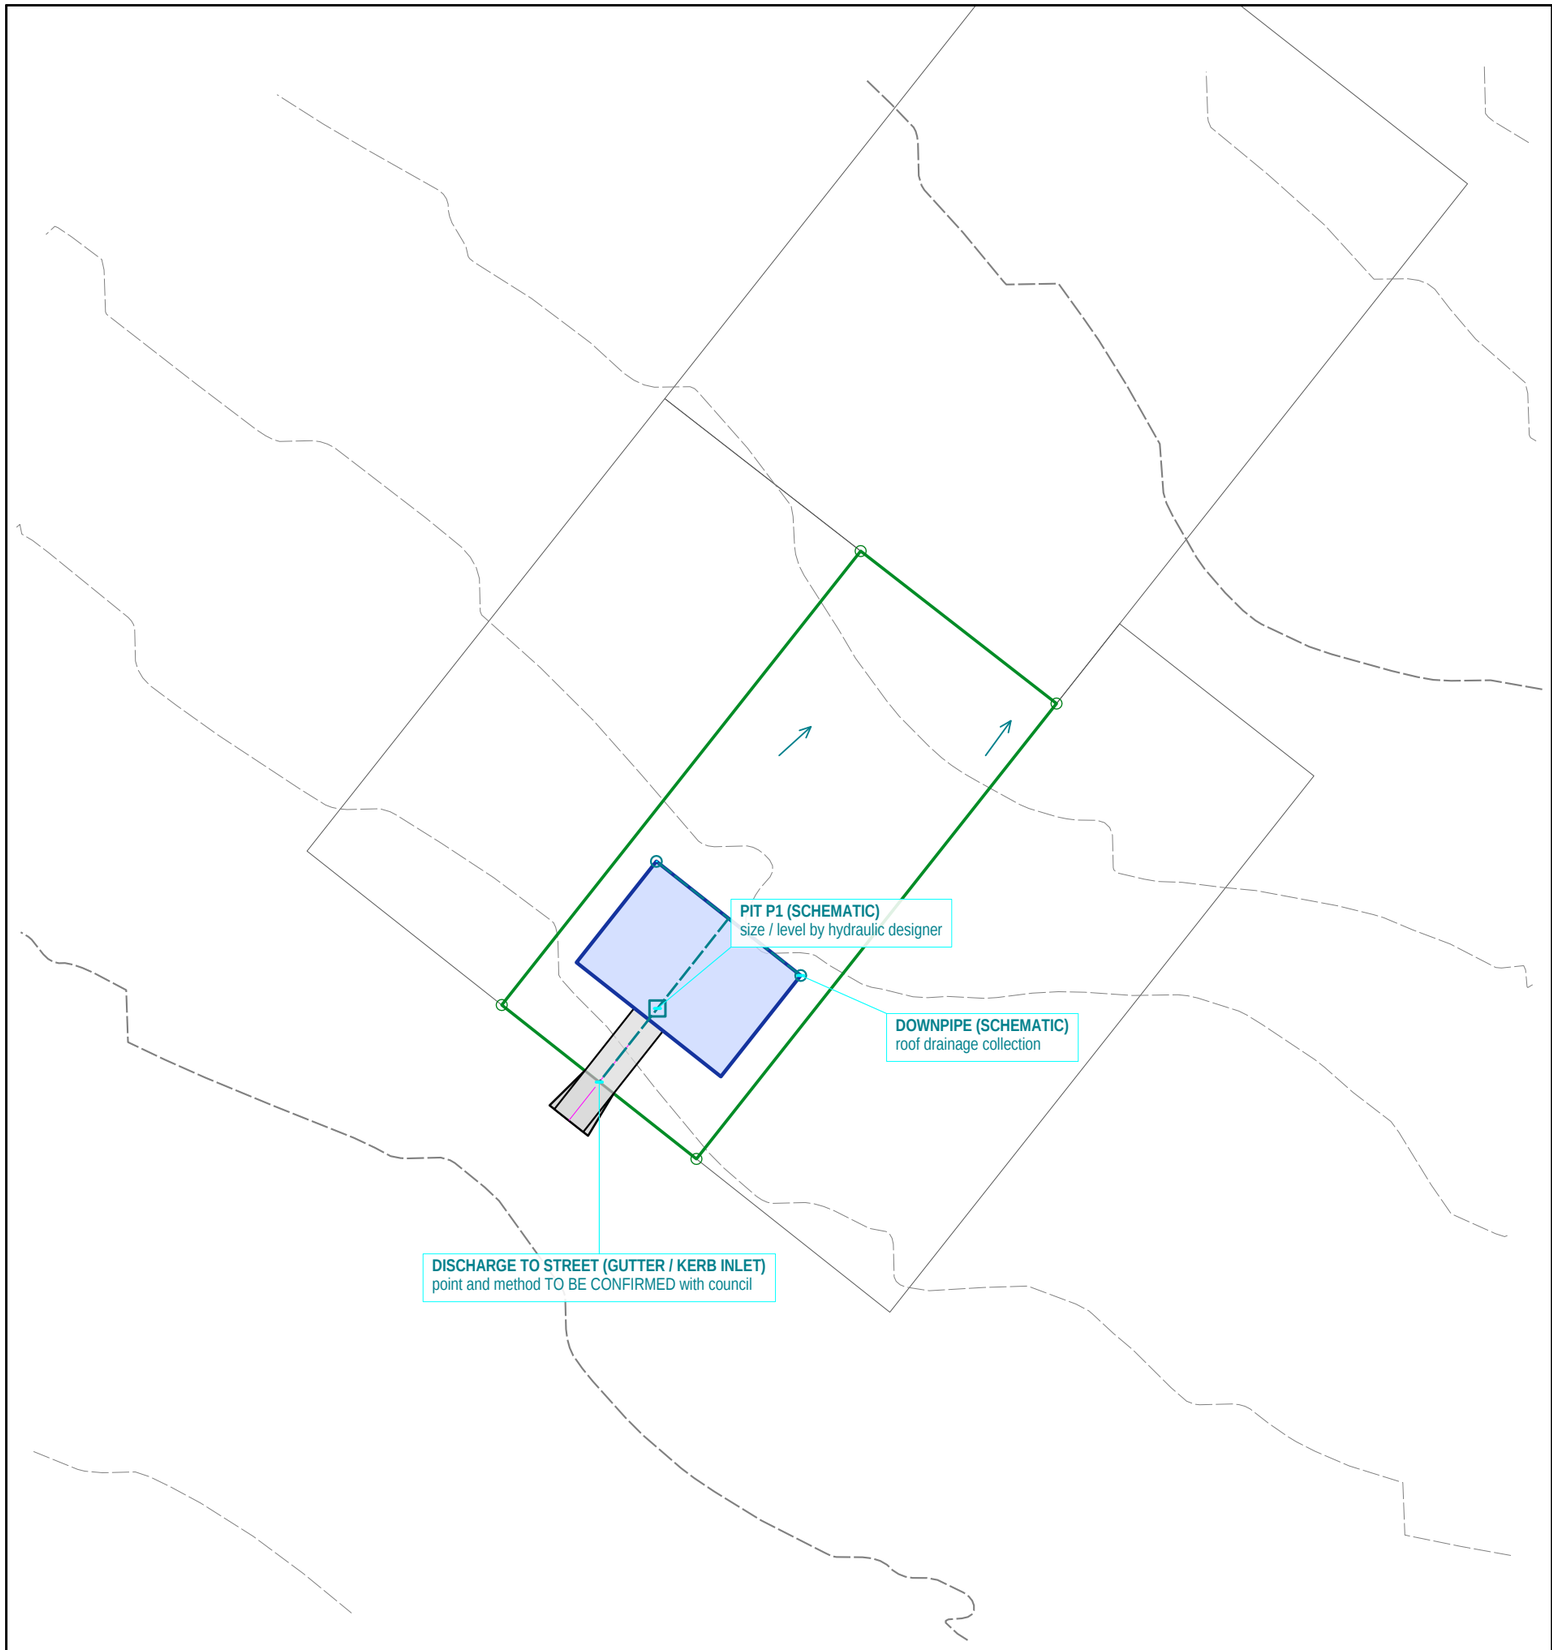



NOTES

WHOLE LOT shown at 1:500.

DISCHARGE: roof water to the street gutter / nearest council kerb inlet (17 m from the structure). Connection details per council standard drawings, TO BE CONFIRMED.

RAINWATER TANK: none supplied (BASIX / council requirement TO BE CONFIRMED); tank location not shown.

OVERLAND FLOW: arrows show the downslope direction of the 5 m DEM sampled over the plan window (INDICATIVE, 5 m posts). Flow paths, catchments and flood behaviour not modelled.

CITED: stormwater.designed_per_eng_standards: GSC Engineering Design Minimum Standards [GSC Development Control Plan 2025 (DCP 2025), C.5 Stormwater, control a, p.43]

CITED: stormwater.farm_building_disposal_clear_of_buildings_m: 3 m [GSC Development Control Plan 2025 (DCP 2025), D.3 Farm buildings and outbuildings, control d, p.46]

CITED: stormwater.osd_roof_plumbing_design_aep_pct: 5 percent [GSC Engineering Design Minimum Standards (Version 1, April 2025), 3.10.4.2-3.10.4.3 On-site detention systems in small developments, p.96]

All drainage shown is SCHEMATIC. Pipe sizes, grades, invert levels, pit types and OSD/detention (if required) by a hydraulic designer.

EXISTING COUNCIL STORMWATER ASSETS: not supplied; to be confirmed from council records / DBYD.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

GRID NORTH
(MGA2020)
SCALE 1:500

LEGEND

- LOT BOUNDARY (CADASTRE; NOT A SURVEY)
- ADJOINING LOT BOUNDARY
- PROPOSED DRAINAGE LINE (SCHEMATIC)
- DOWNPIPE / PIT (SCHEMATIC)
- OVERLAND FLOW DIRECTION (INDICATIVE)
- PROPOSED STRUCTURE
- DRIVEWAY / CROSSOVER

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508


LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling


SHEET TITLE
STORMWATER DRAINAGE PLAN
Roof / surface drainage, discharge and overland flow | 1:500 @

SCALE (A3) **1:500**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C300	**5 of 12**	**A**

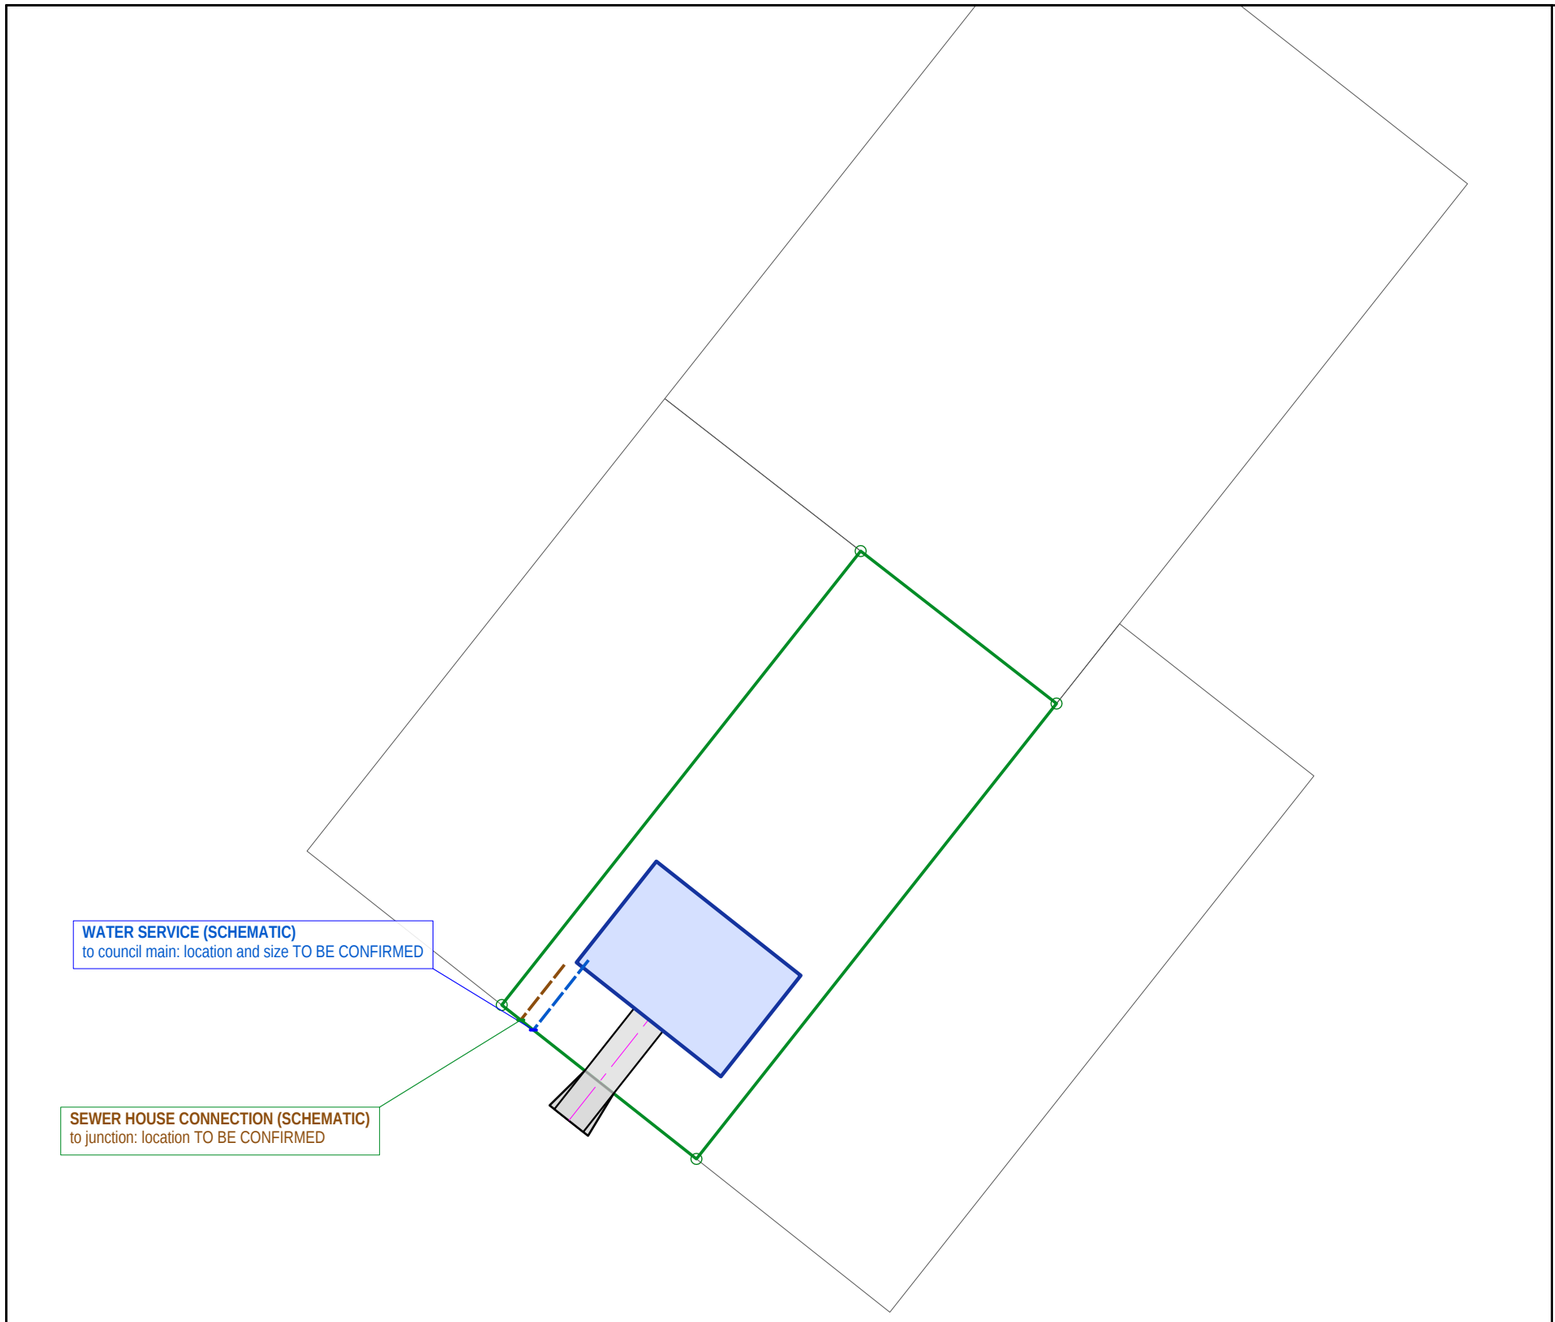



NOTES

WHOLE LOT shown at 1:500.

SCHEMATIC CONNECTIONS run from the structure to the nearest frontage only to show intent. They are NOT located assets.

EXISTING WATER MAIN, SEWER MAIN AND JUNCTION: location not supplied. EXISTING SERVICE LOCATION TO BE CONFIRMED FROM COUNCIL RECORDS / DBYD. Nothing is drawn or assumed.

CITED: Water min cover (carriageway): 0.5 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 4.7.7.4 Service connections - locations (water), p.119]

CITED: Water min cover (footway): 0.3 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 4.7.7.4 Service connections - locations (water), p.119]

CITED: Sewer junction: 150 mm [GSC Engineering Design Minimum Standards (Version 1, April 2025), 5.5.10 Design criteria (sewer), p.130]

CITED: House connection cover: 0.3 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 5.5.10 Design criteria (sewer), p.130]

CITED: House connection grade (1 in N): 60 ratio (1 in N) [GSC Engineering Design Minimum Standards (Version 1, April 2025), 5.5.10 Design criteria (sewer), p.130]

CITED: Build over sewer: Council Building over Sewer Policy (policy document not obtained) [GSC Development Control Plan 2025 (DCP 2025), B.7 Utilities and services, control c, p.26]

Services are indicative. Locate all services by DBYD and physical location (potholing) before excavation.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

N

GRID NORTH
(MGA2020)
SCALE 1:500

LEGEND

- LOT BOUNDARY (CADASTRE; NOT A SURVEY)
- ADJOINING LOT BOUNDARY
- PROPOSED WATER SERVICE (SCHEMATIC)
- PROPOSED SEWER CONNECTION (SCHEMATIC)
- EXISTING SERVICES (DBYD): NONE SUPPLIED
- PROPOSED STRUCTURE

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508


LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling

SHEET TITLE
WATER AND SEWER SERVICES PLAN
Proposed connections (schematic) | 1:500 @ A3

SCALE (A3) **1:500**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C310	6 of 12	**A**

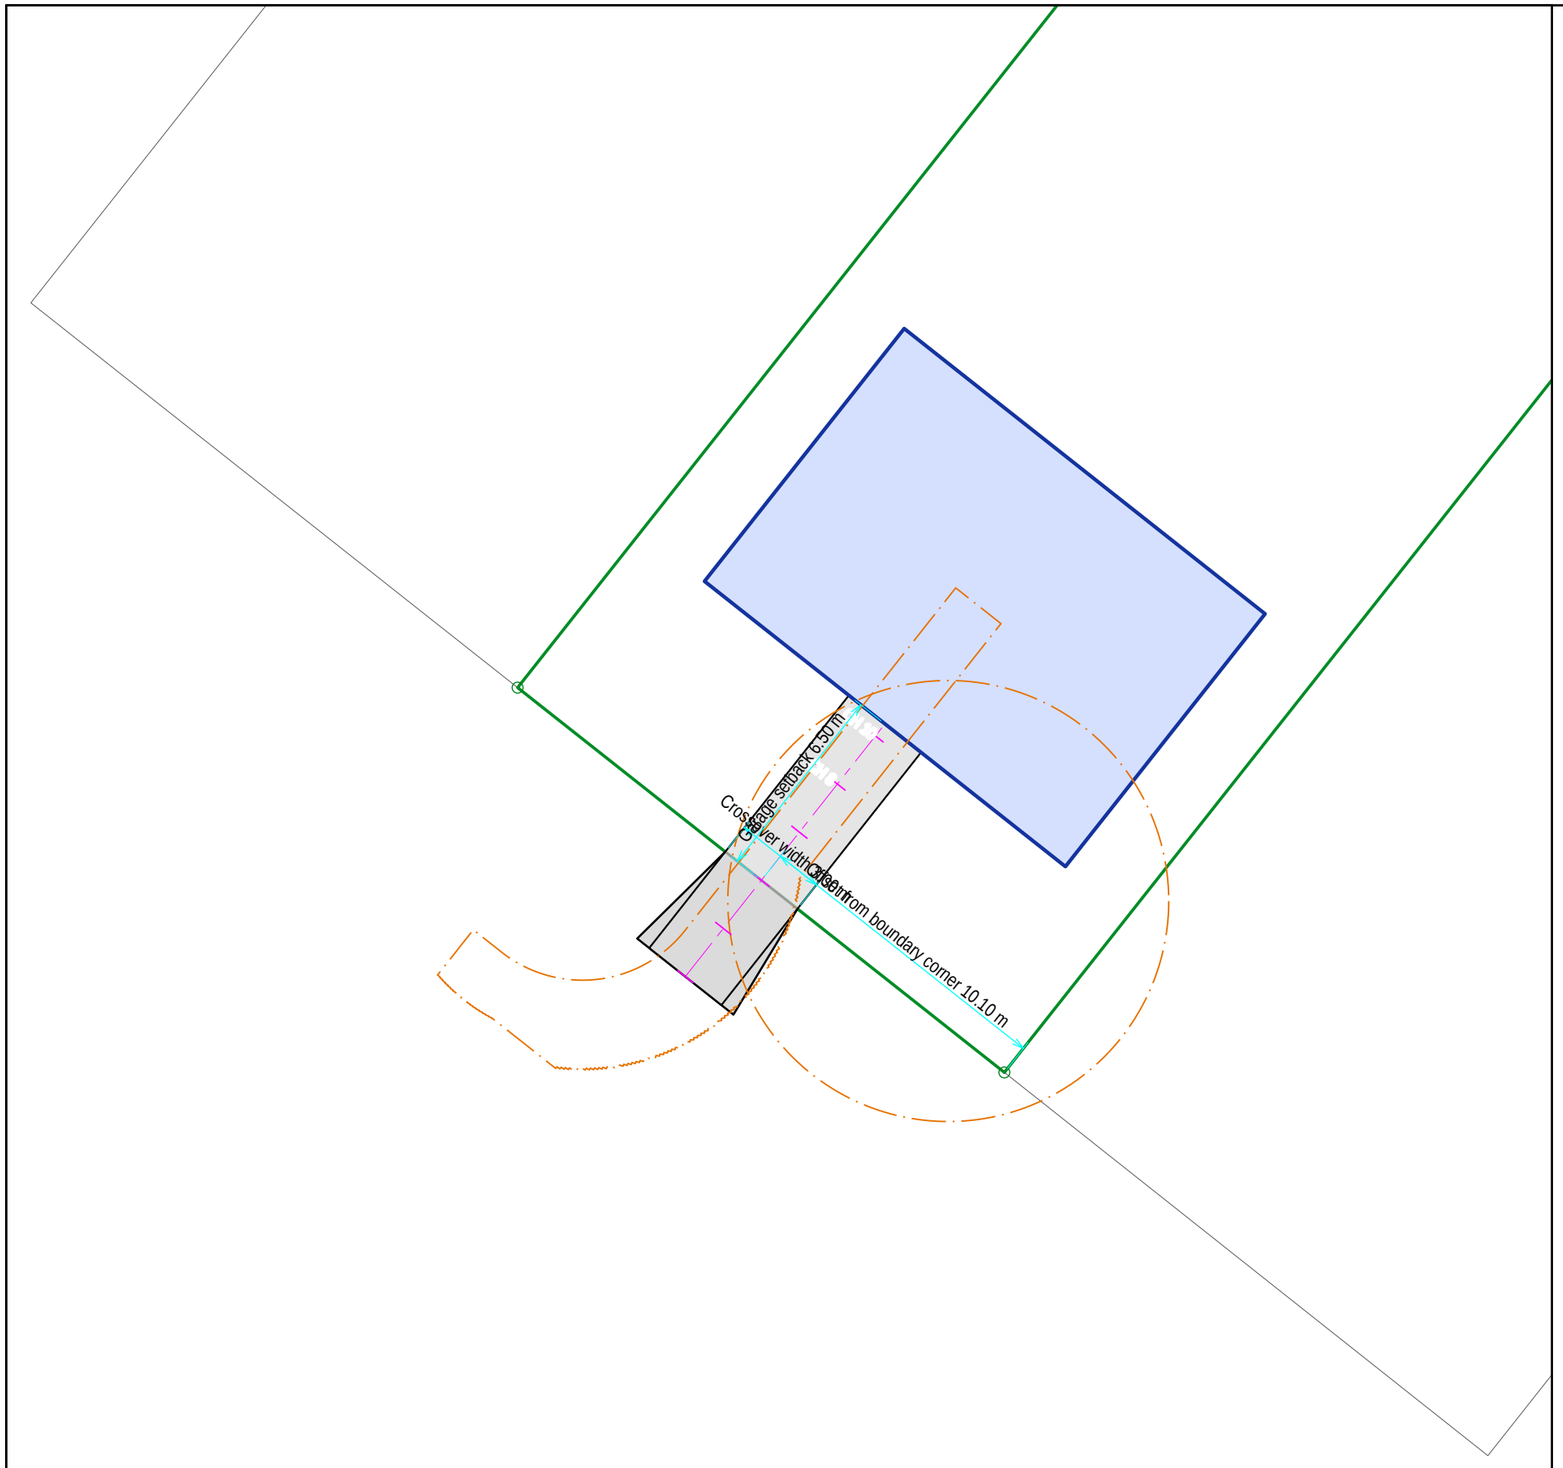

NOTES

Design vehicle B85; swept path and turning circle from SA3 (indicative; verify against AS/NZS 2890.1).

Driveway width 3.0 m.

CITED width of access (excl. layback splays) 3-4.5 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]: design 3.0 m = within range (screening).

CITED: driveway.min_separation_from_common_boundary_m: 0.5 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: driveway.min_crossing_kerb_separation_m: 2 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: driveway.min_separation_m: 6 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: access.crossing_standard: Council standard access drawings + AS2890 series [GSC Development Control Plan 2025 (DCP 2025), C.1.4 Internal driveway, access and parking, p.39]

Crossover to nearest side boundary: 8.53 m (cited minimum to common boundary 0.5 m: OK; screening).

CHECK crossover_width: PASS (3.0 m)

CHECK profile: NOT EVALUATED

CHECK swept_within_allowed_area: PASS (0.0 m2)

CHECK boundary_clearance: PASS (8.026 m)

Longitudinal section: C410. Crossover details: C420. Indicative only. Not a survey. Verify BYDA plans and physically locate services before excavation. Verify setbacks with council. All items marked TO BE CONFIRMED require designer / council confirmation.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

N

GRID NORTH
(MGA2020)
SCALE 1:200

LEGEND

- LOT BOUNDARY
- DRIVEWAY / CROSSOVER
- DRIVEWAY CENTRELINE + CHAINAGE TICKS
- B85 TURNING PATH / CIRCLE
- PROPOSED STRUCTURE

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508

LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling


SHEET TITLE
DRIVEWAY AND CROSSOVER PLAN
B85 swept path / turning circle | 1:200 @ A3

SCALE (A3) **1:200**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C400	**7 of 12**	**A**

HORIZONTAL 1:1000 VERTICAL 1:1000

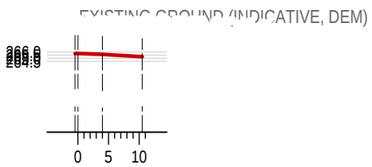

CHAINAGE (m) FROM CENTRELINE START (KERB / ROAD EDGE)

Chainage	10.50
[illegible]	[illegible]

CHECKS AND NOTES

Proposed levels: gutter, kerb and boundary taken at existing ground (no verge regrading assumed); garage threshold at FFL (illustrative RL 265.25). Existing ground INDICATIVE, DERIVED FROM 5 m DEM; DETAIL SURVEY REQUIRED.
max_grade: PASS value 5.84 % (limit 25.0). grades by section: [-3.39, -3.38, -5.84]
change_of_grade@kerb: PASS value 0.0 % (limit 15.0). sag at kerb; min transition/vertical curve 2.0 m (limit quoted over 2.0 m)
change_of_grade@boundary: PASS value 2.45 % (limit 12.5). summit at boundary; min transition/vertical curve 2.0 m (limit quoted over 2.0 m)
b85_scraping_clearance: PASS value 0.083 m (limit 0.0). B85 template, forward and reverse; min underbody-to-ground gap (negative = scrape). Not certification.
B85 SCRAPING / GROUND CLEARANCE: SCREENING ONLY (AS/NZS 2890.1 template method, unverified); not certification. Transitions/vertical curves shown in check notes are minimum lengths to be detailed by the designer.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

LEGEND

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508

LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling

SHEET TITLE
DRIVEWAY LONGITUDINAL SECTION
Existing vs proposed levels along the centreline (screening


SCALE (A3) **H 1:1000 V 1:1000**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION


DRAWING No.	SHEET	REV
C410	**8 of 12**	**A**

CROSSOVER PLAN (1:100)

Kerb return / splay: per council standard drawing, to be confirmed

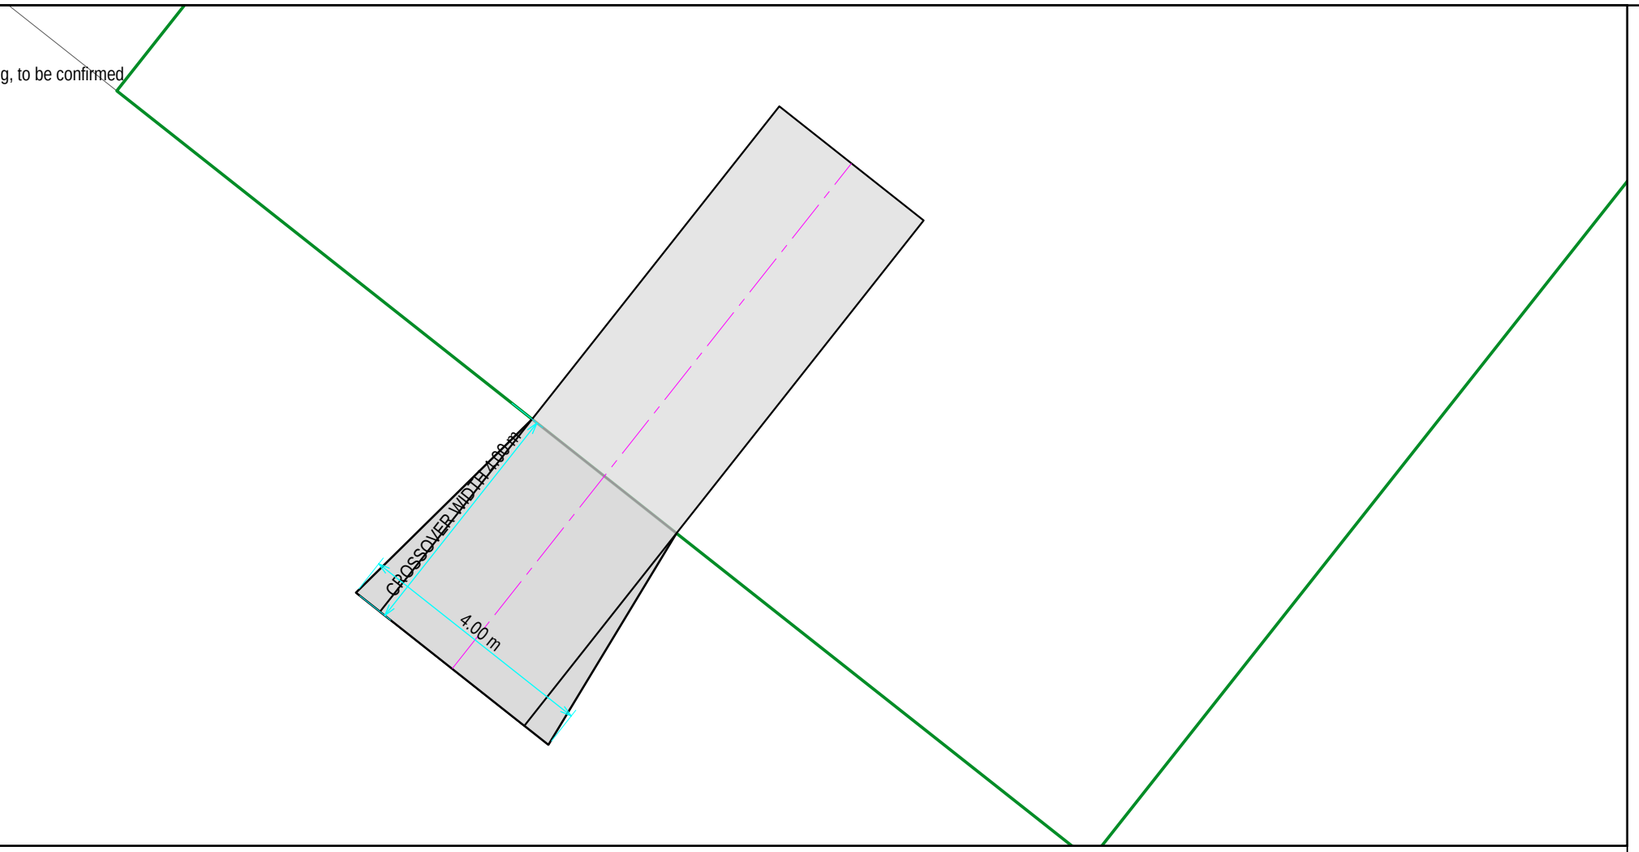

TYPICAL CROSSING SECTION (NOT TO SCALE): typical, to be confirmed by designer

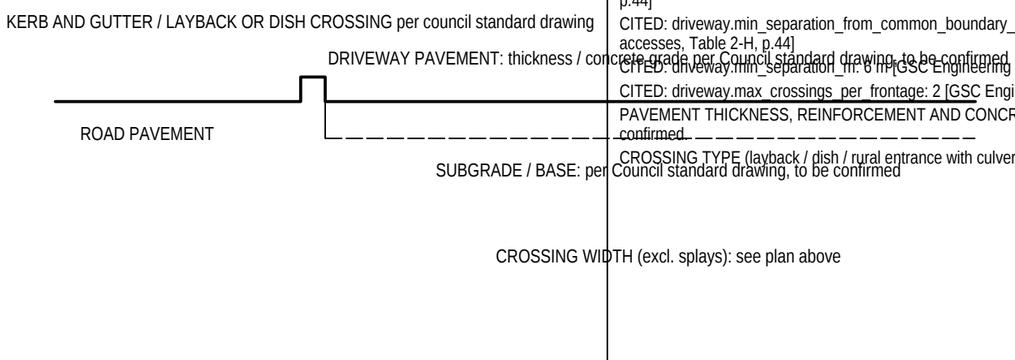

NOTES (CITED STANDARDS)

CITED: access.crossing_standard: Council standard access drawings + AS2890 series [GSC Development Control Plan 2025 (DCP 2025), C.1.4 Internal driveway, access and parking, p.39]

CITED: driveway.min_width_m: 3 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: driveway.max_width_m: 4.5 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: driveway.min_crossing_kerb_separation_m: 2 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: driveway.min_separation_from_common_boundary_m: 0.5 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: driveway.min_separation_m: 6 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

CITED: driveway.max_crossings_per_frontage: 2 [GSC Engineering Design Minimum Standards (Version 1, April 2025), 2.8.7 Vehicular crossings and accesses, Table 2-H, p.44]

PAVEMENT THICKNESS, REINFORCEMENT AND CONCRETE SPECIFICATION: no value cited in the council requirements supplied. Per Council standard drawing, to be confirmed.

CROSSING TYPE (layback / dish / rural entrance with culvert): per Council standard access drawing (DCP C.1.4), to be confirmed with Council.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

N

GRID NORTH
(MGA2020)
SCALE 1:100 / NTS

LEGEND

- LOT BOUNDARY
- DRIVEWAY / CROSSOVER

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508

LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling


SHEET TITLE
CROSSOVER DETAILS


Plan and section (council standard drawing governs)

SCALE (A3) **1:100 / NTS**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C420	**9 of 12**	**A**

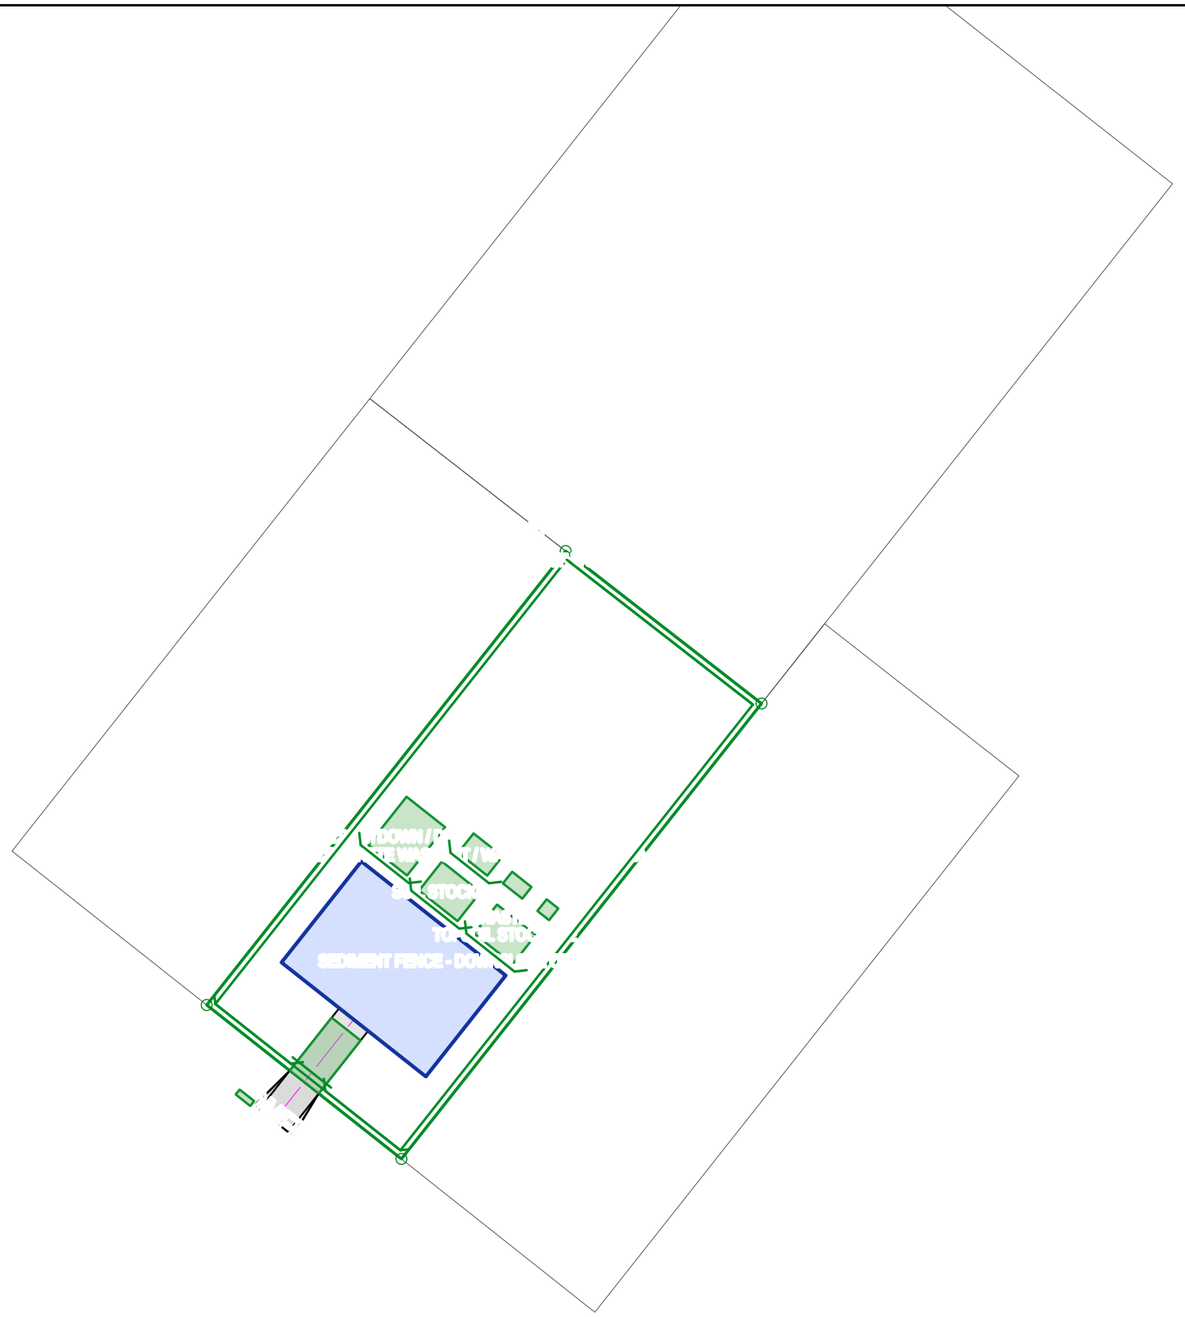



NOTES

WHOLE LOT shown at 1:500.

Elements from SA10: 17.

Lot is within the 2500 m2 ESCP site-size range: the whole site is treated as the limit of works (fence set in 0.5 m from the boundary).

Fence line set in 0.5 m from the lot boundary; works clearance to the fence line 1.5 m (layout parameters, offset unresolved in the standards).

Activity-area footprints (stockpile 4x3 m, washout 3x2 m, bin, toilet) are layout sizes, not requirements; items are searched within 25 m of the building/driveway.

No levels supplied: flow direction assumed from boundary/road, no levels. Sediment fence, diversion and check-dam positions are provisional.

No levels: check dams cannot be assessed for slope and are not shown.


Review and certification by a suitably qualified person required.

UNRESOLVED: No portable toilet siting distance from drains/boundaries is stated. Siting is indicative (away from the downslope bound

UNRESOLVED: No minimum buffer from drainage lines / waterways to disturbed ground is stated for single-lot building sites (only: no

UNRESOLVED: Check dam spacing and height are not stated in the ingested text. Shown only as 'where necessary' on sloping sites, loca

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au



GRID NORTH
(MGA2020)
SCALE 1:500

LEGEND

- LOT BOUNDARY (CADASTRE; NOT A SURVEY)
- ADJOINING LOT BOUNDARY
- ACCESS: Stabilised site access
- BERM: Diversion berm across access
- STOCKPILE: Soil stockpile
- TOPSOIL: Topsoil stockpile
- LAYDOWN: Materials laydown / delivery
- WASHOUT: Concrete washout / wash-down
- BIN: Waste bin
- TOILET: Portable toilet

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508

LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling


SHEET TITLE
EROSION AND SEDIMENT CONTROL PLAN
ESCP | 1:500 @ A3

SCALE (A3) **1:500**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C500	**10 of 12**	**A**

1 SEDIMENT FENCE (TYPICAL, NTS)

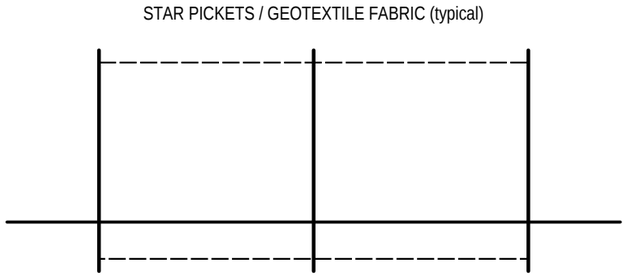

SEDIMENT FENCE: CITED VALUES


Post spacing: 2.5 m [ESC Guidelines for building sites (October 2024), 4.5 Install sediment fencing, step 2, p.25]

Trench depth (upslope): 150 mm [ESC Guidelines for building sites (October 2024), 4.5 Install sediment fencing, step 3, p.25]

Returns: 20 m [ESC Guidelines for building sites (October 2024), 4.5 Install sediment fencing, step 5, p.25]

Joint overlap: 150 mm [ESC Guidelines for building sites (October 2024), 4.5 Install sediment fencing, step 6, p.25]

2 PIPE TRENCH AND BEDDING (SCHEMATIC, NTS)

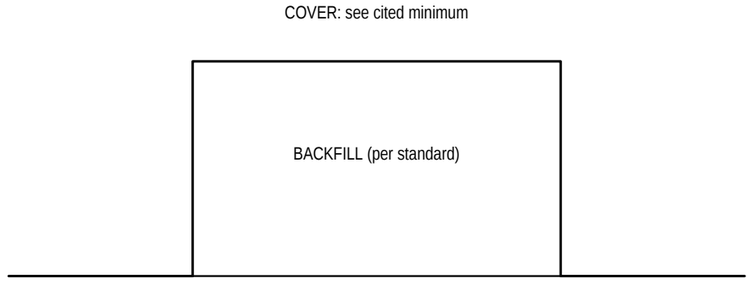

TRENCH: CITED MINIMUMS

Water cover: 0.5 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 4.7.7.4 Service connections - locations (water), p.119]

Sewer house connection: 0.3 m [GSC Engineering Design Minimum Standards (Version 1, April 2025), 5.5.10 Design criteria (sewer), p.130]

Trench open: 3 days [ESC Guidelines for building sites (October 2024), 4.9 Manage service trenches, step 1, p.31]

3 STABILISED SITE ACCESS (TYPICAL)

STABILISED ACCESS: CITED VALUES

Min length: 15 m [Blue Book Vol.1, Volume 1 (the Blue Book), 4th edition (4th edition, March 2004), 6.3.9(a) Stabilised Site Access, p.163]

Min width: 3 m [Blue Book Vol.1, Volume 1 (the Blue Book), 4th edition (4th edition, March 2004), 6.3.9(a) Stabilised Site Access, p.163]

Thickness: 200 mm [Blue Book Vol.1, Volume 1 (the Blue Book), 4th edition (4th edition, March 2004), 6.3.9(a) Stabilised Site Access, p.163]

Max aggregate: 75 mm [Blue Book Vol.1, Volume 1 (the Blue Book), 4th edition (4th edition, March 2004), 6.3.9(a) Stabilised Site Access, p.163]

Underlay: needle-punched geotextile [Blue Book Vol.1, Volume 1 (the Blue Book), 4th edition (4th edition, March 2004), 6.3.9(a) Stabilised Site Access, p.163]

STATUS OF DETAILS

All details are TYPICAL / SCHEMATIC and labelled 'to be confirmed by designer'. Only values shown with a [citation] come from the cited documents.

Driveway crossover section: see C420. Council standard drawings govern.

Indicative only. Not a survey. Verify BYDA plans and physically locate services before excavation. Verify setbacks with council. All items marked TO BE CONFIRMED require designer / council confirmation.

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

LEGEND

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508

LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling

SHEET TITLE
TYPICAL SECTIONS AND DETAILS
Typical, to be confirmed by designer

SCALE (A3) NTS	DATE 2026-10-12
DRAWN JCE	CHECKED
SHEET SIZE A3 LANDSCAPE	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C600	11 of 12	A

GENERAL

Indicative only. Not a survey. Verify BYDA plans and physically locate services before excavation. Verify setbacks with council. All items marked TO BE CONFIRMED require designer / council confirmation.

Cadastral boundaries are from the NSW cadastre and are not a survey; engage a registered surveyor.

Nothing here is a development or building approval.

Dimensions in metres, levels in m (AHD, DEM-derived, indicative).

DATUM AND ACCURACY

Horizontal: GDA2020 / MGA (EPSG:7856).

Vertical: AHD from the NSW 5 m DEM when levels are shown; vertical accuracy NOT STATED by the service. Contours/spot levels are INDICATIVE; detail survey required.

EARTHWORKS

Strip topsoil and stockpile for reuse (cited 100-150 mm: esc.topsoil.strip_depth_max_mm: 150 mm [Blue Book Vol.1, Volume 1 (the Blue Book), 4th edition (4th edition, March 2004), 4.3.2(f) Topsoil handling procedures, p.70]).

Batters 1V:2H cut / 1V:3H fill are assumed; geotechnical advice required. Compact fill per designer specification, to be confirmed.

DRAINAGE

stormwater.designed_per_eng_standards: GSC Engineering Design Minimum Standards [GSC Development Control Plan 2025 (DCP 2025), C.5 Stormwater, control a, p.43]

Drainage on C300 is schematic; sizes and levels by a hydraulic designer.

SERVICES

Locate all services via DBYD and potholing before excavation. Water / sewer per C310 (schematic).

sewer.junction_min_diameter_mm: 150 mm [GSC Engineering Design Minimum Standards (Version 1, April 2025), 5.5.10 Design criteria (sewer), p.130]

DRIVEWAY / CROSSOVER

access.crossing_standard: Council standard access drawings + AS2890 series [GSC Development Control Plan 2025 (DCP 2025), C.1.4 Internal driveway, access and parking, p.39]

Pavement thickness: per council standard drawing, to be confirmed. B85 checks are screening only.

EROSION AND SEDIMENT CONTROL

esc.escp.prepared_by_suitably_qualified_person: True [ESC Guidelines for building sites (October 2024), 3.2 The plans required for different sites, p.15]

esc.inspection.min_frequency: at least weekly, and immediately before site closure and following rainfall events that cause runoff [Blue Book Vol.1, Volume 1 (the Blue Book), 4th edition (4th edition, March 2004), 8.1(n) Maintenance (inspection program), p.192]

DATA AND ASSUMPTIONS REGISTER

C100: existing services: DBYD / council records; aerial underlay (imagery provider disabled/failed)

C101: no missing data

C200: no missing data

C300: existing stormwater assets: council records / DBYD

C310: existing water / sewer assets: DBYD / council records

C400: no missing data

C410: no missing data

C420: no missing data

C500: no missing data

C600: no missing data

JCE INFRASTRUCTURE
Civil engineering and land development
jceinfrastructure.com.au

LEGEND

REV	DESCRIPTION	DATE	BY
A	PRELIMINARY ISSUE	2026-10-12	JCE

DATUM AND ACCURACY NOTES
Horizontal: GDA2020 MGA zone 56 (EPSG:7856)
Vertical: AHD; DEM-derived, indicative only
Units: metres. Not a survey.

PROJECT
Test run: 2//DP227508

LOT / PLAN	2 DP227508
COUNCIL	GUNNEDAH
ZONE / AREA	R2 956 m2
DEVELOPMENT	New Dwelling

SHEET TITLE
GENERAL NOTES AND SPECIFICATION NOTES

SCALE (A3) **AS SHOWN**	DATE **2026-10-12**
DRAWN **JCE**	CHECKED
SHEET SIZE **A3 LANDSCAPE**	JOB No.

PRELIMINARY: NOT FOR CONSTRUCTION

DRAWING No.	SHEET	REV
C700	**12 of 12**	**A**