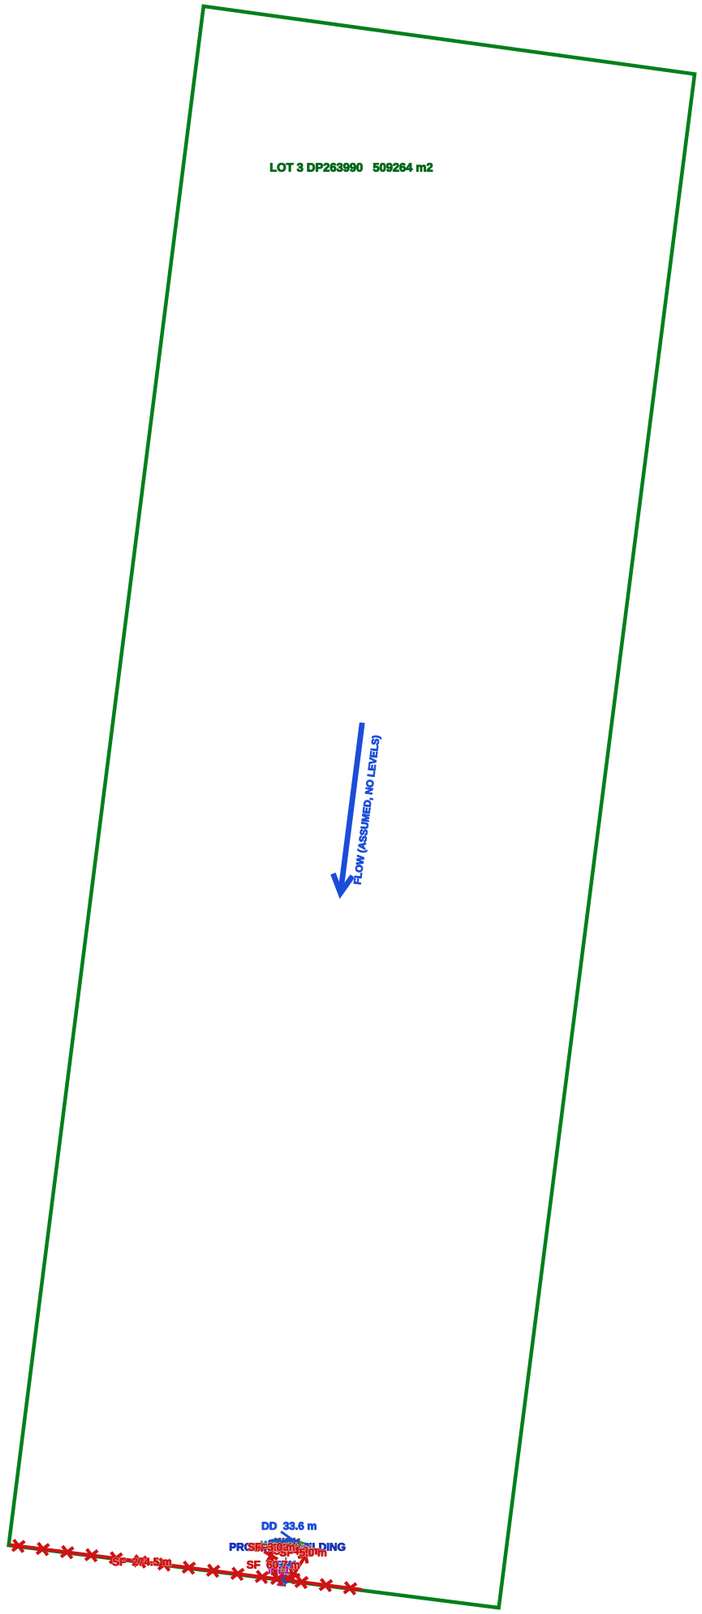


JCE Infrastructure

Civil engineering and land development

EROSION AND SEDIMENT CONTROL PLAN

(PROPOSED - INDICATIVE)

Proposed erosion and sediment control plan

LOT / PLAN
LOT 3 DP263990

DEVELOPMENT
Secondary dwelling (granny flat)

COUNCIL

SCALE
1:5000 @ A3

DATE
2026-10-12

DRAWN BY
Cadastral platform SA10

DATUM / GRID
GDA2020 MGA zone 56 (EPSG:7856)

SITE AREA
509264 sq m (calculated)

EST. DISTURBED AREA
760 sq m

N

0 25 50 75 100 m

SCALE 1:5000 (A3)

LEGEND

Base: lot boundary (green), proposed building (blue)

- SF — Sediment fence (SF) with returns
- SA — Stabilised site access (SA)
- SP — Soil stockpile (SP)
- TS — Topsoil stockpile (TS)
- LD — Materials laydown (LD)
- CW — Concrete washout / wash-down, bunded (CW)
- BIN — Waste bin (BIN)
- WC — Portable toilet (WC)
- IP — Kerb inlet / gutter sediment trap (IP)
- Clean-water diversion drain / bund (DD), arrow = flow
- Diversion berm across access (DB)
- Check dam (CD)
- Limit of works
- No-go / tree protection (NG)
- Direction of fall (flow)

QUANTITIES (indicative)

Sediment fence: 352.3 m (+ returns 29.6 m), 155 posts
Stabilised access: 15.0 x 3.0 m = 45.0 m2, aggregate 9.0 m3
Stockpile / laydown area: 44.0 m2
Diversion drain: 33.6 m
Check dams: 0 Inlet traps: 1
Disturbed area est.: 760.1 m2 of 509264.5 m2 site
Topsoil strip: 76.0-114.0 m3 (100-150 mm, cited)

UNCONFIRMED (designer / certifier)

- Flow direction assumed from boundary/road, no levels.
- sediment_fence.offset_from_boundary_m: to be confirmed by the designer/certifier.
- sediment_fence.max_length_m: to be confirmed by the designer/certifier.
- sediment_fence.return_length_m: to be confirmed by the designer/certifier.
- stockpile.setback_from_lot_boundary_m: to be confirmed by the designer/certifier.
- buffer.min_from_drainage_line_m: to be confirmed by the designer/certifier.
- inlet.kerb_trap_dimensions: to be confirmed by the designer/certifier.
- check_dam.spacing_and_height: to be confirmed by the designer/certifier.
- diversion.bund_dimensions_and_grade: to be confirmed by the designer/certifier.
- washout.setback_from_boundary_and_size: to be confirmed by the designer/certifier.
- amenities.toilet_location_setback: to be confirmed by the designer/certifier.
- waste.bin_location_setback: to be confirmed by the designer/certifier.
- sediment_fence.offset_from_stockpile_m: to be confirmed by the designer/certifier.

GENERAL NOTES (quoted from the cited standards)

1. "The ESCP should be prepared by a suitably qualified person with experience in erosion and sediment control." [Building Sites 2024 p.15]
2. "Place the sediment fence along (parallel to) the contours of the site wherever possible" [Building Sites 2024 p.25]
3. "The ends of the fence must angle upslope to prevent run-off around it." [Building Sites 2024 p.25]
4. "You must have small returns usually every 20 m to limit the amount of water that might flow to any one section." [Building Sites 2024 p.25]
5. "Dig a 150 mm trench on the upslope side of the fence" [Building Sites 2024 p.25]
6. "Place star pickets into the ground, usually 2.5 m apart" [Building Sites 2024 p.25]
7. "They are not suitable for use across creeks, drainage lines or waterways." [Building Sites 2024 p.26]
8. "Ensure there is no build-up of material (including stockpiles) against the sediment fence" [Building Sites 2024 p.26]
9. "constructed with maximum 75 mm aggregate at least 15 metres long and 200 mm thick, underlain by needle-punched geotextile." [Blue Book v1 p.163]
10. "Be a minimum of 3 m long to ensure that there is enough time for sediment to be shaken off" [Building Sites 2024 p.19]
11. "surface water flows are diverted from the area" [Blue Book v1 p.163]
12. "You must locate all stockpiles within the site, behind your sediment controls." [Building Sites 2024 p.23]
13. "constructed on the contour at least 2 (preferably 5) metres from hazard areas" [Blue Book v1 p.70]
14. "Aim to ensure your stockpile is no more than 2 m high (if possible)" [Building Sites 2024 p.23]
15. "Cover your stockpiles securely when no one is on site, or when you expect rainy or windy conditions" [Building Sites 2024 p.23]
16. "You must not discharge water onto neighbouring properties unless you have the owner" [Building Sites 2024 p.21]
17. "you should also install sediment controls in the drains and gutters downslope of your site." [Building Sites 2024 p.26]
18. "Surround your designated construction activity area with bunds that will contain the dirty water" [Building Sites 2024 p.30]
19. "wash down areas (we recommend a 2 m buffer around the largest piece of equipment you will be washing)." [Building Sites 2024 p.14]
20. "Strip topsoil usually to a depth of 100 to 150 millimetres." [Blue Book v1 p.70]
21. "Empty bins for concrete and mortar slurries, paints, acid washings, lightweight waste materials and litter at least weekly and otherwise as necessary." [Blue Book v1 p.189]
22. "It is vital to remove any temporary erosion and sediment control methods after construction ends" [Building Sites 2024 p.35]
23. "Erosion and sediment controls are to remain in place until revegetation is established over 80% of the area which has been revegetated." [Gunnedah Eng. Std 2025 p.160]

MAINTENANCE & INSPECTION SCHEDULE (cited)

Designated person checks all controls
"First, designate a person to check erosion and sediment controls daily" [Building Sites 2024 p.33]

Check controls after rain / wind
"It is vital to carefully check controls after rainy or windy weather and remove any built-up sediment." [Building Sites 2024 p.34]

Self-audit (check sheet): frequency
"at least weekly, and" [Blue Book v1 p.192]

Stockpiles: check and cover
"Check stockpiles at the end of each day and cover them before leaving the site," [Building Sites 2024 p.33]

Sweep road / footpath
"Sweep the road and footpath every day and put soil behind the sediment controls." [Building Sites 2024 p.33]

Sediment fence: repair
"Replace damaged sediment fences and their posts." [Building Sites 2024 p.33]

Remove trapped sediment
"Remove sediment collected by controls such as sediment fences, catch drains and diversion banks." [Building Sites 2024 p.33]

Sediment capacity limit
"Maintain sediment filters so that no more than 30 percent of their design capacity is lost to accumulated ..." [Blue Book v1 p.153]

Stabilised access: top up aggregate
"Top up the gravel, crushed rock or recycled concrete along the access points if the surface has worn down." [Building Sites 2024 p.34]

Waste bins
"Empty bins for concrete and mortar slurries, paints, acid washings, lightweight waste materials and litter at ..." [Blue Book v1 p.189]

Keep spare materials on site
"You have extra materials on site for erosion and sediment controls in case any of your controls are damaged ..." [Building Sites 2024 p.44]

Remove temporary controls
"It is vital to remove any temporary erosion and sediment control methods after construction ends" [Building Sites 2024 p.35]

INDICATIVE PROPOSED ESCP - TO BE REVIEWED AND CERTIFIED BY A SUITABLY QUALIFIED PERSON

Not a survey and not a certified design. Positions follow the cited rules where stated; anything not stated is shown as 'to be confirmed by the designer/certifier'. Cadastre from NSW spatial services; levels, if any, from the stated source.