JCE INFRASTRUCTURE PTY LTD

CIVIL, HYDRAULICS AND INFRASTRUCTURE ENGINEERING

ABN 29 699 165 663 | 0477 207 027 | jayden@jceinfrastructure.com.au
756 Quia Road, Gunnedah NSW 2380 | Servicing NSW and QLD

Our ref: FP-012 Rev B
Date: 12/10/2026

Mr Maverick Parker
Shaw Road Developments (Kingsun Properties and Investments Pty Ltd) [TBC: contracting entity]
PO Box 46, Aitkenvale QLD 4814 [TBC]
By email: [TBC: Kingsun Properties email address]

FEE PROPOSAL

369 Shaw Road, Shaw QLD 4818: operational works design and approval

Stage C of the staged engagement. Follows Stages A and B in FP-011 Rev B. Lot 16 on SP232874.

Proposal	FP-012 Rev B	**Supersedes**	FP-012 Rev 0 dated 03/10/2026
Client	Kingsun Properties and Investments Pty Ltd [TBC: contracting entity]	**Attention**	Mr Maverick Parker
Site	369 Shaw Road, Shaw QLD 4818 (Lot 16 on SP232874, 14.62 ha)	**Authorities**	Townsville City Council; Townsville Water; TMR (Shaw Road)
Prepared by	Jayden Callen, Director	**RPEQ review**	Sunny Lotay, RPEQ, Lotay Civil [TBC]
Related proposal	FP-011 Rev B: Stages A and B	**Validity**	12 months from 12/10/2026; fee confirmed against the approval

Dear Maverick,

This proposal covers Stage C: the civil operational works design, documentation and application that follow the DA approval, through to a For Construction issue. I remain your single point of contact, coordinating survey, geotechnical, Venant and your electrical consultant, with Sunny Lotay, RPEQ, directing and certifying JCE's engineering. Rev B adds an agreed scope schedule, a drawn external works boundary, a design responsibility schedule for the pump station, flood verification triggered by design change, and a defined post-approval For Construction issue.

1.0 PROJECT UNDERSTANDING

- **Works.** Bulk earthworks for flood immune fill platforms and the waterway corridor, the internal road and waterway crossing, the Dalrymple Road West intersection, stormwater drainage and treatment, and extension of water and sewerage to the site.
- **Expected conditions.** The 2017 approval (MI16/0016) required OW approval for water, sewerage, stormwater, roadworks and landscaping, and an all movements intersection on Dalrymple Road West with northern pavement widening. JCE expects similar conditions and prepares a condition compliance matrix at kick-off. Historic conditions indicate likely interfaces; the new approval governs.
- **Servicing.** The option confirmed in Stage A is designed and confirmed by network analysis. A private package pump station is the fee basis.
- **Flood consistency.** JCE compares the detailed terrain, drainage and crossing geometry with the approved flood assessment as part of design coordination (item C-C3).
- **Registration.** Professional engineering in Queensland is carried out by, or under the direct supervision of, an RPEQ. JCE's OW engineering is directed, reviewed and certified by Sunny Lotay, RPEQ [TBC: registration number and disciplines], Lotay Civil, JCE's associate certifying engineer under a standing associate agreement.

2.0 SCOPE SCHEDULE (FEE BASIS)

The lump sum is based on one coordinated OW submission for the agreed ultimate site-wide civil scheme:

ELEMENT	INCLUDED QUANTITY
External intersection	One, Dalrymple Road West (all movements, turn treatments, northern widening)
Internal road	Up to 600 m total length
Waterway crossing	One, up to four standard precast culvert cells
Fill platforms	About 10 ha
External water main	Up to 800 m
Sewer rising main and pump station	Up to 1,000 m; one private package pump station
Internal pipe lengths, basins and outlets, stages	[TBC: recorded in the scope schedule from the approved plans before commencement]

Separate staged applications, interim drainage, service or flood arrangements, additional crossings or intersections, and works above these quantities are additional services unless listed in the schedule. Tenancy car parks, hardstands, internal drives and building connections are excluded and their owner is recorded in the interface schedule.

3.0 SCOPE OF SERVICES

Part C-A: General and approvals

C-A1 Kick-off, conditions review and condition compliance matrix; the OW scope schedule and design responsibility schedule; survey and geotechnical briefs.

C-A2 Pre-design meeting with Council and Townsville Water, at which the applicable Townsville Water CTM and SEQ codes, Council amendments and other standards are recorded; TMR coordination; coordination with Kingsun's electrical consultant for Ergon Energy and NBN Co.

C-A3 OW application, road works permit and road corridor applications for the service mains where required, and RPEQ certification.

Part C-B: External works

C-B1 Dalrymple Road West intersection to the traffic engineer's design report. The external works boundary is shown on the agreed scope plan and identifies the included widening, drainage, frontage tie-ins and reinstatement. Minor road reinstatement for the included service mains is identified expressly. Utility relocation design, other intersection or network upgrades, specialist underbore design, contractor temporary works and construction traffic control are excluded unless listed in the schedule. Street lighting is excluded.

C-B2 Safety in Design report for the intersection and external works.

Part C-C: Internal works

C-C1 Bulk earthworks: 3D model consistent with the approved flood assessment, platforms, batters, compensatory excavation, waterway corridor works, scour protection, volumes and staging.

C-C2 Internal road and waterway crossing: geometry, sections, pavement design to AGPT Part 2 from the geotechnical report, culvert with headwalls, wingwalls, scour protection and barrier, using standard precast units. A bridge or open-span solution, extra cells or crossings, project-specific structural or foundation design, or materially different waterway protection or fish passage works need scope and fee confirmation.

C-C3 Stormwater: trunk drainage and outlets, detention required by the approval, treatment devices, updated DRAINS and MUSIC models, and comparison of the design with the approved flood assessment. Where Venant determines that a material change needs verification, or a condition requires it, verification proceeds under PS1 once its scope is agreed.

C-C4 Water supply: demand assessment, network analysis for main sizes and fire flows, external connection main and internal reticulation.

C-C5 Sewerage: network analysis of the receiving system, internal gravity reticulation, civil design of the private package pump station (wet well, valve pit, emergency storage, access, layout) and the rising main. Before detailed design, the responsibility schedule names who provides hydraulic duty and storage criteria, wet well layout, structural and buoyancy assessment, equipment selection, mechanical, electrical and control design, power and backup, and owner acceptance. JCE's civil design and network analysis are coordinated with those parties.

C-C6 Erosion and sediment control plans and details to SC6.4.

C-C7 Documentation and quality: notes, drawing register, Safety in Design register, quality review and one round of consolidated client comments.

Part C-D: After approval

C-D1 After OW approval and any agreed authority responses, one coordinated For Construction set based on the approved design, incorporating minor approval markups. Redesign arising from conditions, extra staged packages and further submissions are additional services.

4.0 DELIVERABLES

SHEET	TITLE (FOR APPROVAL, THEN FOR CONSTRUCTION)
CV-1000	Cover sheet, drawing index, locality plan and general notes
CV-1001	Existing site, existing services, clearing and demolition
CV-1100	Bulk earthworks plans, sections and volumes
CV-1200	Internal road plan, longitudinal section and cross sections
CV-1210	Waterway crossing culvert: plan, sections and details
CV-1300	Dalrymple Road West intersection: plan, sections, pavement, signs and marking
CV-1400	Stormwater drainage plans, longitudinal sections and schedules
CV-1410	Stormwater quality treatment and detention
CV-1500	Water supply reticulation
CV-1600	Sewerage reticulation, pump station and rising main
CV-1700	Erosion and sediment control
CV-1800	Standard and typical details

- Condition compliance matrix; OW scope schedule; design responsibility schedule.
- Stormwater management design report with DRAINS and MUSIC (RPEQ certified); water and sewerage network analysis and design report (RPEQ certified); Safety in Design report and register.
- OW application package with RPEQ certification; road works permit and corridor applications; For Construction set after approval.

5.0 RESPONSIBILITIES AND EXCLUSIONS

ITEM	RESPONSIBLE
Civil design, coordination, single point of contact	JCE (Jayden Callen)
Direct supervision and RPEQ certification	Sunny Lotay, RPEQ (Lotay Civil), through JCE
Flood verification where triggered	Venant Solutions, through JCE (PS1)
Detail survey; geotechnical investigation	Kingsun, or JCE under PS3 and PS4
Electrical, street lighting, Ergon Energy and NBN Co design	Kingsun's electrical consultant
Pump station mechanical, electrical and controls	Pump supplier or electrical consultant, per the responsibility schedule
Waterway barrier, riverine and environmental approvals	Kingsun's planner or environmental specialist
Tenancy works: pads beyond the platforms, car parks, hardstands, drives, building connections	Kingsun's architect or other designer, or JCE by quotation

Also excluded: landscape and irrigation; building and structural design beyond standard precast units and Council standard drawings; road works within Shaw Road (a second intersection is offered as an option in Section 10.0); traffic engineering, road safety audits and construction traffic management; Council standard or shared pump stations, trunk infrastructure and upgrades beyond the connection mains; tender documents, contract administration, inspections and certification of completed works; site visits and travel; authority fees and charges; redesign after a change to the approved layout or conditions.

6.0 ASSUMPTIONS AND INFORMATION REQUIRED

1. The DA is approved generally in accordance with the Stage B footprint, with one external intersection on Dalrymple Road West and no road works in Shaw Road.
2. Kingsun provides the approval, approved plans, referral response and approved Flood Impact Assessment, contact details for its other consultants, and written authority for JCE to lodge and liaise.
3. Survey and geotechnical information are available within three (3) weeks of commencement, and review comments are returned within five (5) business days.
4. Design is to the Council standards and codes current at the date of the DA approval, as recorded at the pre-design meeting.
5. Sub-consultant provisional sums include JCE's 10% margin. PS2 covers Council, SARA or TMR and Townsville Water information requests. JCE advises Kingsun before a PS is exhausted.
6. The lump sum is confirmed against the approved plans and conditions before commencement. Where the approval differs materially from the scope schedule, JCE provides a revised fee for approval.

7.0 PROGRAM

Twelve (12) weeks from acceptance to lodgement, then the For Construction set within two (2) weeks of OW approval. Council's assessment period is excluded.

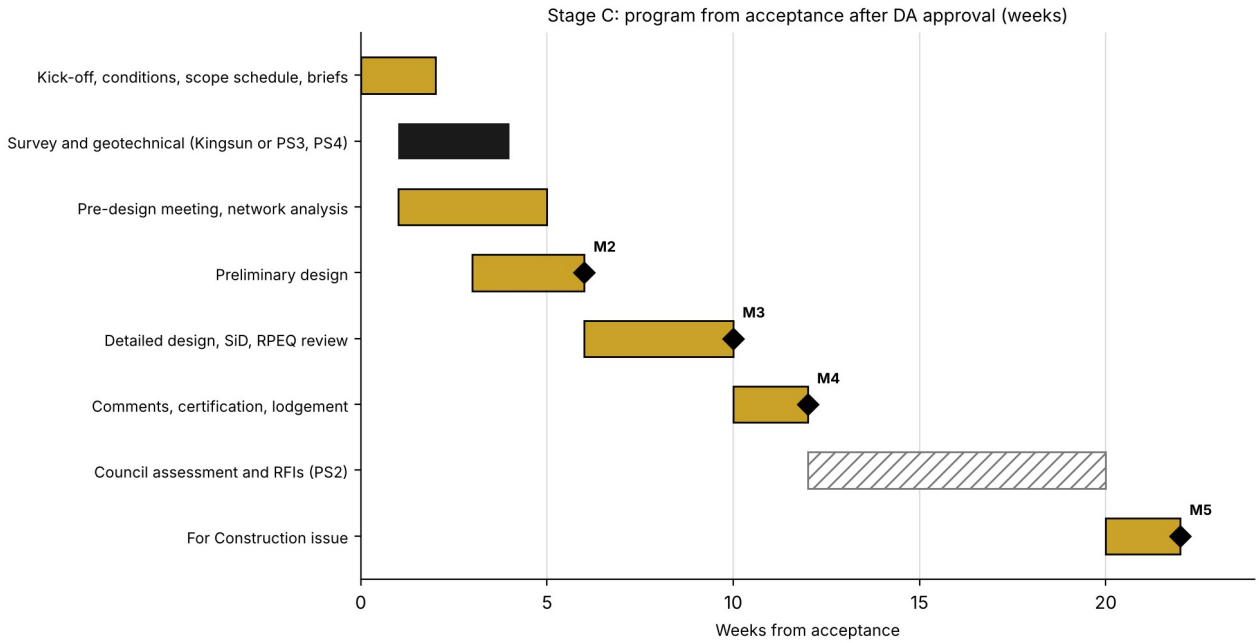


Figure 1: Stage C program. Gold: JCE. Black: survey and geotechnical. Hatched: Council.

8.0 FEE SCHEDULE

ITEM	PART C-A: GENERAL AND APPROVALS	FEE (EXCL. GST)
C-A1	Kick-off, review of the DA approval, conditions and approved Flood Impact Assessment; condition compliance matrix; OW scope schedule (quantities and works boundaries) and design responsibility schedule; survey and geotechnical briefs.	$ 3,500.00
C-A2	Authority liaison: pre-design meeting with Council and Townsville Water (applicable codes recorded), coordination with TMR for works in Shaw Road and with Kingsun's electrical consultant; up to ten (10) hours of online meetings.	$ 2,500.00
C-A3	Operational works application, road works permit and road corridor applications for the service mains, and coordination of RPEQ certification.	$ 3,000.00
	Part C-A lump sum (excl. GST)	**$ 9,000.00**

ITEM	PART C-B: EXTERNAL WORKS	FEE (EXCL. GST)
C-B1	Dalrymple Road West all movements intersection: geometry, turn treatments and pavement widening, pavement design, drainage, kerbs, signs and pavement marking, frontage tie-ins and reinstatement within the agreed works boundary.	$ 17,000.00
C-B2	Safety in Design report for the intersection and external works.	$ 1,500.00
	Part C-B lump sum (excl. GST)	**$ 18,500.00**

ITEM	PART C-C: INTERNAL WORKS	FEE (EXCL. GST)
C-C1	Bulk earthworks: 3D model consistent with the approved flood assessment, fill platforms (up to about 10 ha), compensatory excavation, waterway corridor works and scour protection.	$ 12,000.00
C-C2	Internal road (up to 600 m) and one waterway crossing of up to four culvert cells, including pavement design.	$ 14,000.00
C-C3	Stormwater drainage, detention and quality treatment, updated DRAINS and MUSIC models, and comparison of the detailed design with the approved flood model.	$ 13,500.00
C-C4	Water supply: network analysis, external connection main (up to 800 m) and internal reticulation.	$ 14,500.00
C-C5	Sewerage: network analysis, internal gravity reticulation, private package pump station civil design and rising main (up to 1,000 m).	$ 18,000.00
C-C6	Erosion and sediment control plans and details.	$ 3,000.00
C-C7	Documentation, Safety in Design register, quality review and one (1) round of consolidated comments.	$ 4,000.00
	Part C-C lump sum (excl. GST)	**$ 79,000.00**

ITEM	PART C-D: AFTER APPROVAL	FEE (EXCL. GST)
C-D1	After OW approval: one coordinated For Construction set incorporating minor approval markups and conditions that do not require redesign.	$ 2,000.00
	Part C-D lump sum (excl. GST)	**$ 2,000.00**

ITEM	RPEQ REVIEW AND CERTIFICATION (SUNNY LOTAY, LOTAY CIVIL)	FEE (EXCL. GST)
C-R1	Direction and review through the design and RPEQ certification of the OW documentation by Sunny Lotay, RPEQ (35 hours at $200/hr) [TBC].	$ 7,000.00
	RPEQ allowance [TBC] (excl. GST)	**$ 7,000.00**

SUMMARY	FEE (EXCL. GST)
Part C-A: General and approvals	$ 9,000.00
Part C-B: External works	$ 18,500.00
Part C-C: Internal works	$ 79,000.00
Part C-D: After approval	$ 2,000.00
RPEQ review and certification allowance [TBC]	$ 7,000.00
Total fee (excl. GST)	**$ 115,500.00**
GST (10%)	$ 11,550.00
Total fee (incl. GST)	**$ 127,050.00**

Provisional sums (not included in the total fee)

ITEM	PROVISIONAL SUM	AMOUNT (EXCL. GST)
PS1	Flood verification by Venant Solutions where the flood specialist determines a material design change needs verification, or an approval condition requires it. Allowance pending Venant's quotation [TBC].	$ 4,000.00
PS2	Responses to information requests on the OW application from Council, SARA or TMR and Townsville Water, at the Schedule of Rates.	$ 5,000.00
PS3	Detail survey of the works areas, services and frontages to JCE's brief, if not commissioned directly by Kingsun [TBC].	$ 15,000.00
PS4	Geotechnical investigation for the fill platforms, pavements, culvert and pump station to JCE's brief, if not commissioned directly by Kingsun [TBC].	$ 15,000.00
	Total provisional sums (excl. GST)	**$ 39,000.00**
	Total fee and provisional sums (excl. GST)	**$ 154,500.00**

The lump sums include incidental expenses; no site attendance or travel is included. The RPEQ allowance is invoiced monthly at $200/hr as incurred up to the amount shown [TBC].

9.0 PAYMENT TERMS

MILESTONE	TRIGGER	%	AMOUNT (EXCL. GST)
M1	On acceptance and the kick-off meeting	10%	$ 10,850.00
M2	On issue of the preliminary design for review (end of week 6)	30%	$ 32,550.00
M3	On issue of the draft OW set for review (end of week 10)	30%	$ 32,550.00
M4	On issue of the final RPEQ certified set and lodgement (end of week 12)	25%	$ 27,125.00
M5	On issue of the For Construction set after OW approval	5%	$ 5,425.00
	Total	**100%**	**$ 108,500.00**

Payment is due within fourteen (14) days of invoice. Provisional sums and the RPEQ allowance are invoiced monthly as incurred.

10.0 VARIATIONS AND ADDITIONAL SERVICES

ADDITIONAL SERVICE (NOT IN THE TOTAL FEE)	FEE (EXCL. GST)
Second external intersection on Shaw Road (TMR), if required by the new approval, with Safety in Design	$ 19,500.00
Council standard sewage pump station in lieu of a private package station	By quotation
Tenancy works: pads, car parks, hardstands and service connections	By quotation
Bill of quantities and engineer's estimate	By quotation
Tender documentation and civil specification	By quotation
Site inspection by JCE, including travel to Townsville	$ 2,000.00
Additional coordination meeting (up to 2 hours, with file note)	$ 400.00 each
Construction phase services: RFIs, hold point inspections, WAE review, certification of completed works	By separate proposal

Other work beyond the agreed scope is carried out at the Schedule of Rates (Attachment B) with Kingsun's prior written approval.

11.0 INSURANCE, LIABILITY AND VALIDITY

- **Insurance.** Professional indemnity $10 million any one claim and $20 million in the aggregate; public liability $10 million.
- **Liability cap.** Subject to Attachment A, $250,000, to the extent permitted by law.
- **Order of precedence.** This proposal and scope; the fee schedule; Attachment A; other attachments.
- **Validity.** Twelve (12) months from 12/10/2026, with the lump sum confirmed against the approved plans and conditions before commencement.

Yours faithfully,

[Signature: Jayden to insert]

Jayden Callen
Director, JCE Infrastructure Pty Ltd
0477 207 027 | jayden@jceinfrastructure.com.au

12.0 ACCEPTANCE AND AUTHORITY TO PROCEED

To accept, please sign below and return a copy to JCE. Acceptance is agreement to Attachment A.

OFFERED BY	ACCEPTED FOR AND ON BEHALF OF THE CLIENT
JCE Infrastructure Pty Ltd (ABN 29 699 165 663) [Signature: Jayden to insert] Jayden Callen, BEng (Hons), MIEAust Director Date: 12/10/2026	Kingsun Properties and Investments Pty Ltd [TBC: contracting entity] Signature: _____ Name: _____ Position: _____ Date: ____ / ____ / _____

ATTACHMENT A

Terms and Conditions

1 Engagement. JCE Infrastructure Pty Ltd (JCE) will provide the consulting services described in the accompanying Fee Proposal, together with any further services agreed in writing from time to time (the Services). The Fee Proposal, these Terms and Conditions, and any attachments together form the agreement between JCE and the Client (the Agreement). In the event of inconsistency, the order of precedence stated in the Fee Proposal applies.

2 Standard of care. JCE will perform the Services with the skill, care and diligence reasonably expected of a competent consultant providing services of a similar nature at the time they are provided. JCE does not warrant a particular outcome beyond this standard.

3 Client's obligations and reliance. The Client will provide JCE, free of charge and in a timely manner, with all information, documents, instructions, approvals and reasonable site access necessary to perform the Services. JCE is entitled to rely on the accuracy and completeness of information provided by or on behalf of the Client and is not responsible for verifying it unless expressly agreed.

4 Existing services information. Existing services information is based on records provided by others and is indicative only unless confirmed by survey, potholing or physical service location. JCE is not responsible for inaccuracies in existing services information provided by others.

5 Fees and payment. The Client will pay JCE the fees and reimbursable expenses set out in the Fee Proposal, plus GST, on the payment terms stated. Invoices may be issued progressively for Services performed, whether or not all Services are complete. Payment is due in accordance with the Fee Proposal and, where no period is stated, within fourteen (14) days of the date of invoice, without set-off or deduction. Overdue amounts may accrue interest at 2% above the Reserve Bank of Australia cash rate, calculated daily from the due date until paid.

6 Variations. Any change to the scope, program or assumptions on which the fee is based may result in an adjustment to the fee and/or program. JCE will not commence varied work until the variation and its commercial effect are agreed in writing, except where instructed to proceed by the Client, in which case the varied work will be charged on a time and expenses basis at JCE's Schedule of Rates.

7 Design status and use of documents. Documents are issued for the purpose stated in the relevant transmittal (such as For Review, For Approval, For Tender or For Construction). Documents must not be used for construction unless expressly issued by JCE as For Construction. The Client must not rely on superseded or draft issues.

8 No construction responsibility. Unless expressly included, JCE is not engaged to provide construction supervision, superintendent services, contractor management, temporary works design, work health and safety management, construction quality assurance, or certification of completed works. JCE is not responsible for construction methods, temporary works, site safety, contractor performance, or departures from the approved design during construction.

9 Intellectual property and native files. Intellectual property in the drawings, reports, models, calculations and other documents prepared by JCE remains the property of JCE. On payment in full of all amounts due, JCE grants the Client a non-exclusive licence to use the issued documents for the project for which they were prepared. Native CAD files, Civil 3D models, design surfaces, pipe networks and editable calculation files remain JCE's property and will not be issued unless expressly agreed in writing; where issued, they are provided for information only and must be verified by the recipient before use. Third-party model data licensed to JCE (including Council flood model data) is subject to the licensor's conditions and cannot be issued to the Client or any third party.

10 Third-party reliance. No third party may rely on JCE's documents, advice, calculations or drawings without JCE's prior written consent. The documents may not be used for any project other than that for which they were prepared.

11 Limitation of liability. To the maximum extent permitted by law, JCE's total aggregate liability to the Client arising out of or in connection with the Agreement or the Services, whether in contract, tort (including negligence), equity, under statute or otherwise, is limited to the amount stated in the Fee Proposal (Liability Cap). JCE is not liable for any indirect, consequential, economic or special loss, including loss of profit, revenue, use or opportunity. JCE is discharged from all liability in respect of the Services on the expiry of the period stated in the Fee Proposal or, if none is stated, six (6) years after completion of the Services.

12 Australian Consumer Law. Nothing in the Agreement excludes, restricts or modifies any guarantee, right or remedy that cannot lawfully be excluded. To the extent permitted, JCE's liability for breach of a non-excludable guarantee is limited, at JCE's option, to supplying the relevant Services again or paying the cost of having them supplied again.

13 Confidentiality. Each party will keep confidential the other's confidential information and use it only for the purposes of the Agreement, except where disclosure is required by law, the information is already public, or the other party consents in writing.

14 Insurance. JCE maintains professional indemnity insurance of $10 million for any one claim and $20 million in the aggregate, and public liability insurance of $10 million. Certificates of currency are available to the Client on request.

15 Subconsultants and certifying engineer. JCE may engage subconsultants and registered engineers to assist with, review or certify specialist aspects of the Services. Queensland professional engineering services are carried out by, or under the direct supervision of, a Registered Professional Engineer of Queensland (RPEQ), and RPEQ certification is provided by an appropriately registered engineer.

16 Suspension and termination. Either party may terminate the Agreement on fourteen (14) days' written notice if the other is in material breach and has not remedied it within that period, or immediately on the insolvency of the other party. JCE may suspend the Services immediately if the Client fails to pay any amount when due. On termination, the Client will pay JCE for all Services performed and commitments reasonably made up to the date of termination.

17 Dispute resolution. The parties will attempt in good faith to resolve any dispute (other than recovery of unpaid amounts) by negotiation and, failing resolution within fourteen (14) days, by mediation before commencing litigation. This clause does not prevent JCE from recovering money owing or seeking urgent interlocutory relief.

18 Assignment. Neither party may assign or transfer its rights or obligations under the Agreement without the other's prior written consent, which will not be unreasonably withheld.

19 Governing law. The Agreement is governed by the laws of New South Wales, and the parties submit to the non-exclusive jurisdiction of the courts of that jurisdiction. [TBC: Jayden to confirm NSW or Queensland law for this Queensland project.]

ATTACHMENT B

Schedule of Rates

ROLE	RATE (EXCL. GST)
Director / Principal Engineer	$200/hr | $1,600/day
RPEQ review and certification (Sunny Lotay, Lotay Civil, associate certifying engineer)	$200/hr [TBC]
Senior Engineer	$190/hr | $1,520/day
Project Engineer	$180/hr | $1,440/day
Design Engineer	$170/hr | $1,360/day
CAD / Drafting Technician	$160/hr | $1,280/day
Administration / Document Control	$140/hr | $1,120/day
Subconsultants: flood modelling, traffic, survey, geotechnical and other specialists	At cost + 10%

Rates are exclusive of GST and subject to annual review. A day is eight (8) hours. Disbursements (printing, plotting, travel and authority or lodgement fees) are charged at cost.

ATTACHMENT C

Key personnel

Detailed CVs and referee contacts are available on request.

Jayden Callen, BEng (Hons) Civil, MIEAust (EA 11036201)

Director, JCE Infrastructure Pty Ltd. Project lead and single point of contact for every stage. National Engineering Register application in progress. Jayden is not RPEQ registered; JCE's Queensland engineering is carried out under the direct supervision of Sunny Lotay, RPEQ (below).

- **Townsville land development.** Civil Design Manager and Senior Engineer, Langtree Consulting Engineers, Townsville, 03/2025 to 05/2026: managed four civil designers on concurrent 50 to 100 lot subdivisions, including DATSIP subdivisions in Aurukun, Pormpuraaw and Napranum; coordinated flood modelling, electrical and hydraulic subconsultants into joint design packages, including culverts and retaining walls; prepared engineering services reports, engineer's estimates and bills of quantities.
- **Design management with tier-one contractors.** SCP Consulting, 06/2023 to 03/2025 (Civil Engineer; Site Engineer on a 12-month secondment to CPB Contractors; Senior Engineer and Design Manager, Townsville): Defence projects at RAAF Base Townsville, HMAS Cairns, RAAF Base Tindal and HMAS Watson, including site engineering and quality assurance for about 10 km of potable and fire water mains at RAAF Base Townsville.
- **Sewer rising mains and pump stations.** Western Sydney International Airport Business Precinct Stage One (JCE, subconsultant to Underscore Projects, client AT&L): managed the design program for the SRM-01 sewer rising main and completed the technical review of the contractor's sewage pumping station package (59 review items at Revision F, including four hold points).
- **Stormwater and flooding.** DRAINS and MUSIC X; flood impact assessment to ARR 2019 with specialist flood modellers; Katherine Aquatics, NT (about 80 per cent of the civil design, including earthworks pads above the 1% AEP flood level, grading, pavements, stormwater and water quality); flood levee inspection and certification report at Gunnedah, NSW (JCE, 2026).
- **Software.** Civil 3D (including AutoLISP automation), DRAINS, MUSIC X, CIRCLY, Allievi, Navisworks and InfraWorks.

Sunny Lotay, RPEQ [TBC: registration number and disciplines], NER

Principal, Lotay Civil. JCE's associate certifying engineer under a standing associate agreement. Sunny directs and reviews JCE's civil engineering for this commission from the design basis through to issue, and certifies the work within his registered disciplines. [TBC: Jayden to confirm registration details, availability for this program and a two-line experience summary supplied by Sunny.]